

FUEL PUMPS

SINGLE PACK




LV6800

SOLID STATE 12V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Dry lift: 305mm (12") min
- Shut off pressure: 3 - 4.5 PSI, LPH: 113.5
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

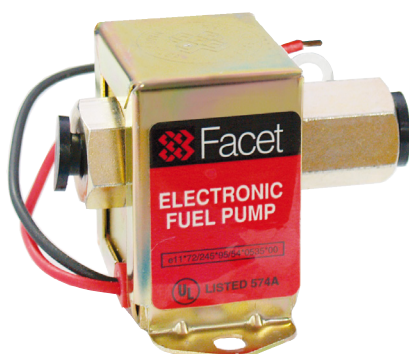


LV6801

SOLID STATE 12V UNIVERSAL FUEL PUMP & FITTINGS KIT



- Material: Stainless steel internal, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Dry lift: 305mm (12") min
- Shut off pressure: 4-7 PSI, LPH: 121.1
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

Note: Includes clamps & straight 5/16" fillings & nuts

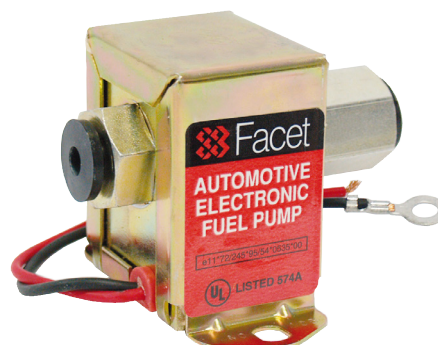


LV6802

SOLID STATE 12V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Dry lift: 305mm (12") min
- Shut off pressure: 7 - 10 PSI, LPH: 128.7
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

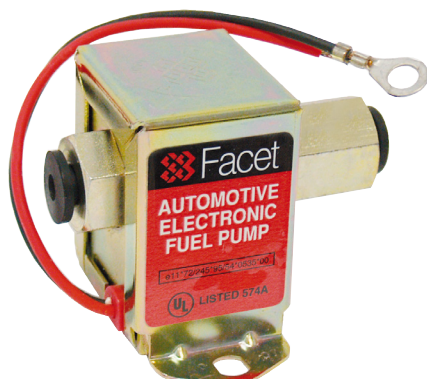

LV6803

SOLID STATE 12V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Dry lift: 610mm (12") min
- Shut off pressure: 4-7 PSI, LPH: 121.1
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

