

12V MINI & HIGH POWER RELAYS




SINGLE PACK

E50-0028

12V/40A 8 PIN DOUBLE
MINI RELAY
SPST N/O CIRCUIT



- Voltage: 12V
- Amperage: 40A
- Tin plated copper contacts
- Resistor protected
- Includes mounting bracket
- Operating temperature: -40°C to +125°C
- No. of pins: 8



E50-0013

12V/70A 4 PIN HIGH AMP
MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 70A
- Silver contacts
- Resistor protected
- Removable bracket
- Operating temperature: -40°C to +125°C
- No. of pins: 4

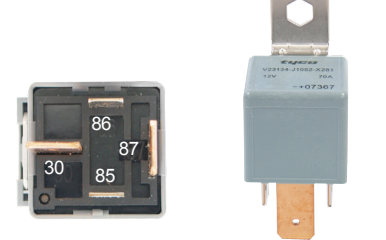

R4-1280RBX

12V/80A 4 PIN HIGH AMP
MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 80A
- Silver contacts
- Resistor protected
- Removable bracket
- Operating temperature: -40°C to +125°C
- Sealed type
- No. of pins: 4



LV4506

12V/100A HEAVY DUTY
POWER RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 100A Cont./180A Peak
- Housing material: Nylon PA6
- M6 tin plated copper studs x 2
- 6.3mm Brass push-on terminals x 2
- Includes mounting bracket
- Operating temperature: -40°C to +80°C
- No. of pin: 4



LV4504

12V/130A
HIGH CURRENT RELAY
SPST N/O CIRCUIT

- Voltage: 12V
- Amperage: 130A
- Silver-tin oxide contacts
- Resistor protected
- Housing material: Nylon PA6
- M6 tin plated copper studs x 2
- 2 Pole connector
- Operating temperature: -40°C to +85°C
- No. of pins: 4
- IP rating: IP67



LV4541

12V/20A 4 PIN MINI RELAY
SPST N/O CIRCUIT

- Voltage: 12V
- Amperage: 20A
- Resistor protected
- No. of pins: 4
- Applications: Nissan
- Reference: 25230-C9980

