



FEATURES

- RWL2835 Series LED work lamps produce a light output of up to 1976 max lumens
- Flood Beam Pattern
- 6 x 5W Osram LED's produce super white light close to daylight.
- Multi-volt 10-30V DC input & super low current draw
- 50,000 hour LED lifespan with solid state technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Simple 2 wire installation
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED WORK LAMPS



ROADVISION's RWL2835 Stealth Series work lamps suit the most demanding work environments. With IP68 and IP69K protection, the RWL2835 Stealth Series feature a super durable light weight diecast housing and polycarbonate lens, allowing for worry free operation in Australia's toughest conditions. Available with a cleverly designed low profile mounting bracket or sleek flush mount and simple two wire installation, the RWL2835 Stealth Series provide a high quality, low fuss solution to your lighting requirements.


PART NUMBERS



RWL2835F
LED Work Light 10-30V Rectangle 35W Flood Beam




RWL2835FFM
LED Work Light 10-30V Rectangle Flush Mount 35W Flood Beam

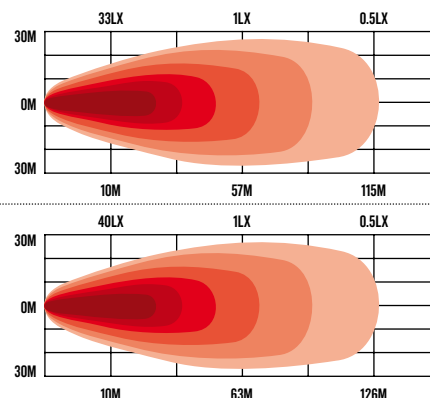

SPECIFICATIONS	RWL2835F	RWL2835FFM
BEAM PATTERN	160° Flood	160° Flood
MAXIMUM LUMENS	1975lm	1986lm
INPUT VOLTAGE	10-30 VDC	10-30 VDC
MAXIMUM WATTS	35W	35W
NUMBER OF LEDS	6 x 5W Osram	6 x 5W Osram
CURRENT DRAW @ 13.8V	1.7 - 2.9 Amps	1.7 - 2.9 Amps
MAXIMUM LUX @ 10M	33LX	40LX
MAXIMUM DISTANCE @ 1 LUX	57m	63m
LENS CONSTRUCTION	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Aluminium	Aluminium
CUT OUT	N/A	158 x 46mm
DIMENSIONS AXBXC	157 x 50 x 60mm	196 x 62 x 53mm
WIRING	2 Pin Deutsch Plug	2 Pin Deutsch Plug

LINE DIAGRAM - RWL2835F

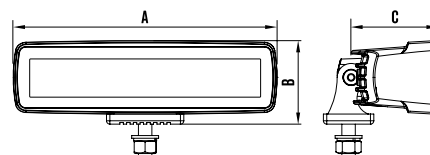

LINE DIAGRAM - RWL2835FFM

