



FEATURES

- RWL814 Series LED work lamps produce 1210lm of instant light output
- Models available with integrated handles
- 1.5W-Osram LED's produce super white light close to daylight
- Multi-volt 10-30V DC input & super low current draw
- 50,000 hour LED lifespan with solid state technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Simple 2 wire installation with integrated Deutsch plug
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED WORK LAMPS



MULTI-VOLT
10-30 VDC



POLYCARB
LENS



ALUMINIUM
HOUSING



WATERPROOF



DEUTSCH
CONNECTOR



COLOUR
TEMP



REVERSE
POLARITY
PROTECTION



OSRAM
LEDS



EMI
EMC
RADIO
INTERFERENCE
APPROVED



5 YEAR
WARRANTY

ROADVISION's RWL814 Series LED work lamps are feature packed and one of the most versatile lamps in the range. The RWL814 Series work lamps are fully adjustable, allowing you to take full control of where and when you need the light.

PART NUMBERS



RWL814FHS

LED Work Light 10-30V Square 14W Flood Beam with Switch & Handle



RWL814FHR

LED Work Light 10-30V Round 14W Flood Beam with Switch & Handle




RWL814SF

LED Work Light 10-30V Square 14W Flood Beam



RWL814RF

LED Work Light 10-30V Round 14W Flood Beam

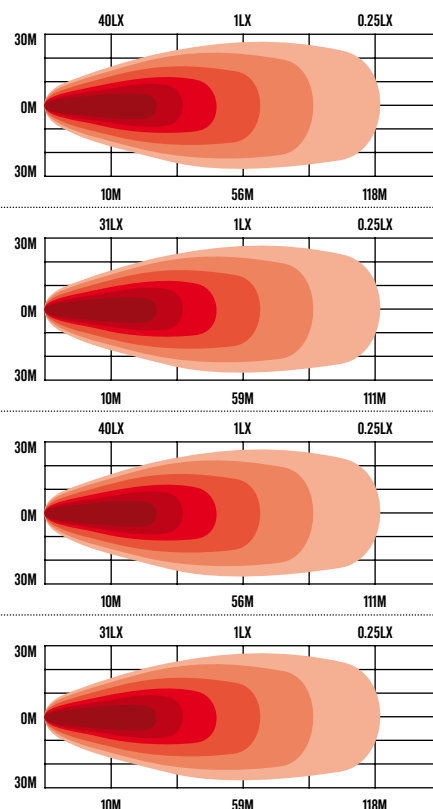



SPECIFICATIONS

	RWL814FHS	RWL814FHR	RWL814SF	RWL814RF
BEAM PATTERN	Flood	Flood	Flood	Flood
MAXIMUM LUMENS	1210lm	1250lm	1210lm	1250lm
INPUT VOLTAGE	10-30 VDC	10-30 VDC	10-30 VDC	10-30 VDC
TOTAL WATTS	13.5W	14W	13.5W	13.5W
NUMBER OF LEDS	9 x 1.5W Osram LEDS	9 x 1.5W Osram LEDS	9 Osram LEDS	9 Osram LEDS
CURRENT DRAW @ 13.8V	1.20 Amps	1.25 Amps	1.25 Amps	1.25 Amps
MAXIMUM LUX @ 10M	40 Lux	31 Lux	40 Lux	31 Lux
LENS CONSTRUCTION	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Aluminium	Aluminium	Die-Cast Aluminium	Die-Cast Aluminium
DIMENSIONS AXBXC	100 x 185 x 57mm	107 x 187 x 63mm	100 x 129 x 40mm	107 x 133 x 41.5mm

LINE DIAGRAM

