

# PRODUCT RELEASE

## Premium Connectors For Dual Battery Installations



Two Up battery terminal lugs are purpose designed for dual battery installations where it is not desirable to cut or modify the factory battery leads or terminals. The concept allows factory strap type battery terminals to be fitted to a special tapered adaptor at the same time providing an additional terminating post to connect auxiliary batteries and/or ancillary equipment.



E55-0050



E55-0051




shown with both universal flanged hex nuts fitted




shown with one universal flanged hex nut and adaptor post fitted



shown with the Nylon battery lug cover fitted

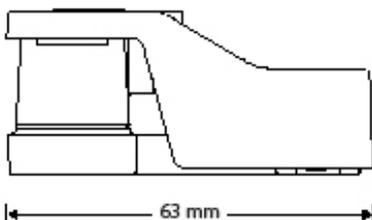

63 mm

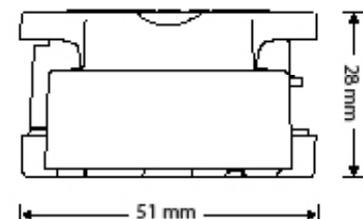

51 mm

### Physical

<b>Battery Lug</b>	Forged JIS 3771 brass satin nickel plating
<b>Adaptor post</b>	Machined JISC3604 brass satin nickel plated
<b>Protective cover</b>	Impact/Temperature resistant PA-6 (Nylon)
<b>Hardware</b>	Cover screw SUS304, all other zinc plated steel

### Mechanical

<b>Termination</b>	M8 x 18L threaded post
<b>Adaptor post</b>	M8 x SAE taper to J1811
<b>Weight*</b>	Positive kit: 175g Negative kit: 170g

### Dimensions

See illustration