

NOCO genius[®] 10[™] CHARGER & MAINTAINER

GENIUS10AU

10A CHARGING CURRENT

6V & 12V

150W OUTPUT POWER

230Ah BATTERY CAPACITY



GENIUS CHARGERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



What's In The Box

- Genius 10 Battery Charger w/ Interchangeable Connector
- Clamps w/ Integrated Eyelets
- Mounting Bracket w/ Strap
- (2) Self-Tapping Screws
- User Guide & Warranty Information

Retail Packaging

Dimensions: 4.41" x 4.76" x 9.10"
Weight: 3.99lbs
UPC: 0-46221-19005-2

Inner Carton:

Dimensions: 4.60" x 4.76" x 9.21"
Weight: 4.17lbs

Master Carton:

Dimensions: 19.02" x 9.84" x 5.71"
Weight: 17.42lbs
Quantity: 4
UCC: 10046221190059

Units Per Pallet:

224 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

NOCO genius[®] 10[™] TECH SPECS

GENIUS CHARGERS


ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE

GENIUS10AU

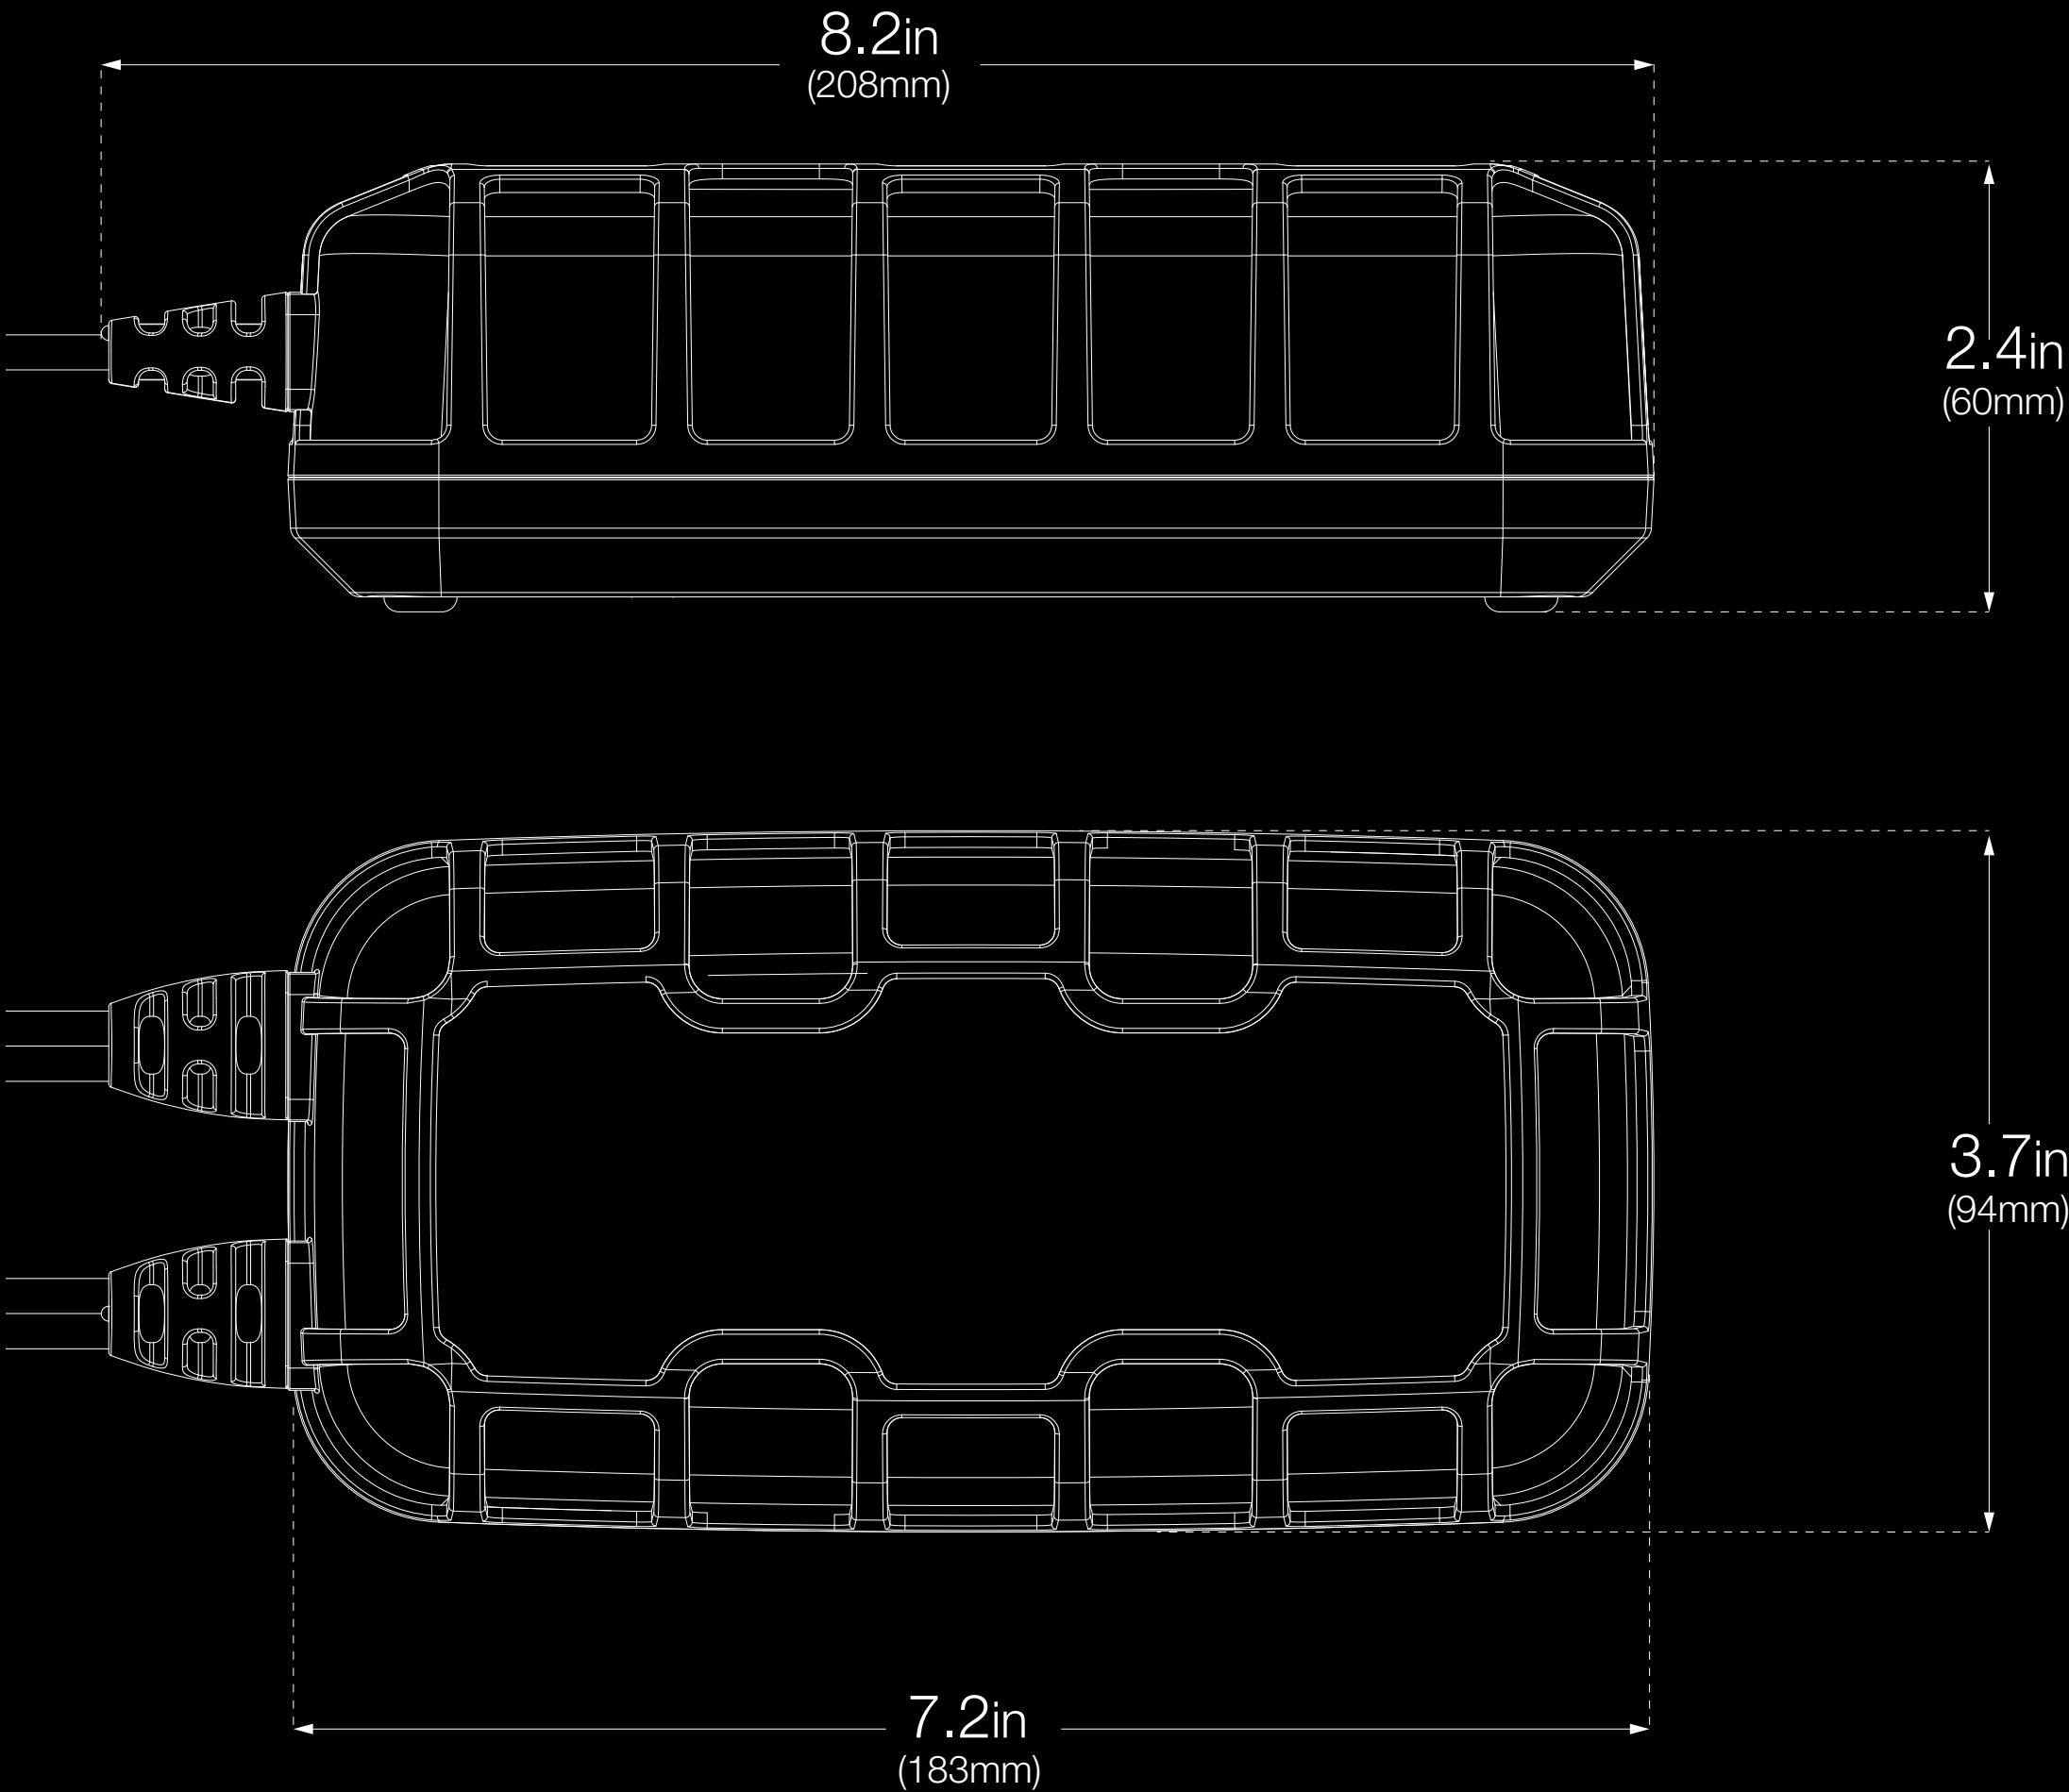

Operating Requirements

Line Voltage AC: 120V to 240V AC, 50-60Hz
Operating Temperature: -4° to 104° F (-20° to +40° C)
Storage Temperature: -22° to 140° F (-30° to +60° C)
Relative Humidity: 0 to 95% Non-Condensing

Charging

Current: 10 Amp DC
Voltages: 6V, 12V
Chemistry: Lead-Acid and Lithium
Types: Wet, Gel, MF, CA, EFB, AGM, Lithium
Battery Capacity Range: 2 Ah - 230 Ah
Maintenance: All Battery Sizes

Power

Output Power: 150 Watts (Max)
Efficiency: 87% (120VAC / 230VAC)

Protection

IP Rating: IP65

Safety

Short Circuit: Yes
Open-Circuit: Yes
Overheating: Yes
Overcharge: Yes
Spark-Proof: Yes
Reverse Polarity: Yes

Size and Weight

Height: 7.1 Inches (180mm)
Width: 3.6 Inches (92mm)
Depth: 2.3 Inches (59mm)
Weight: 3.33 Pounds (1.5kg)

Cord Management

DC Cable Length: 77.6 Inches (197cm)
DC Cable Size: 14 AWG
DC Fuse Size: 20 AMP Micro Blade Fuse
AC Cable Length: 71.7 Inches (182cm)
AC Cable Size: 18 AWG
Oil, gas, grease, water, chemical, UV, abrasion resistant

Limited Warranty


3-Year Limited Warranty

Charging Times

Battery Size	Approx. Charge Time in Hours	
	6V	12V
20Ah	1.5	1.5
40Ah	3	3
80Ah	6	6
100Ah	7	7
230Ah	17.3	17.3



NOCO genius[®] 10[™] CHARGER COMPARISON GENIUS10AU

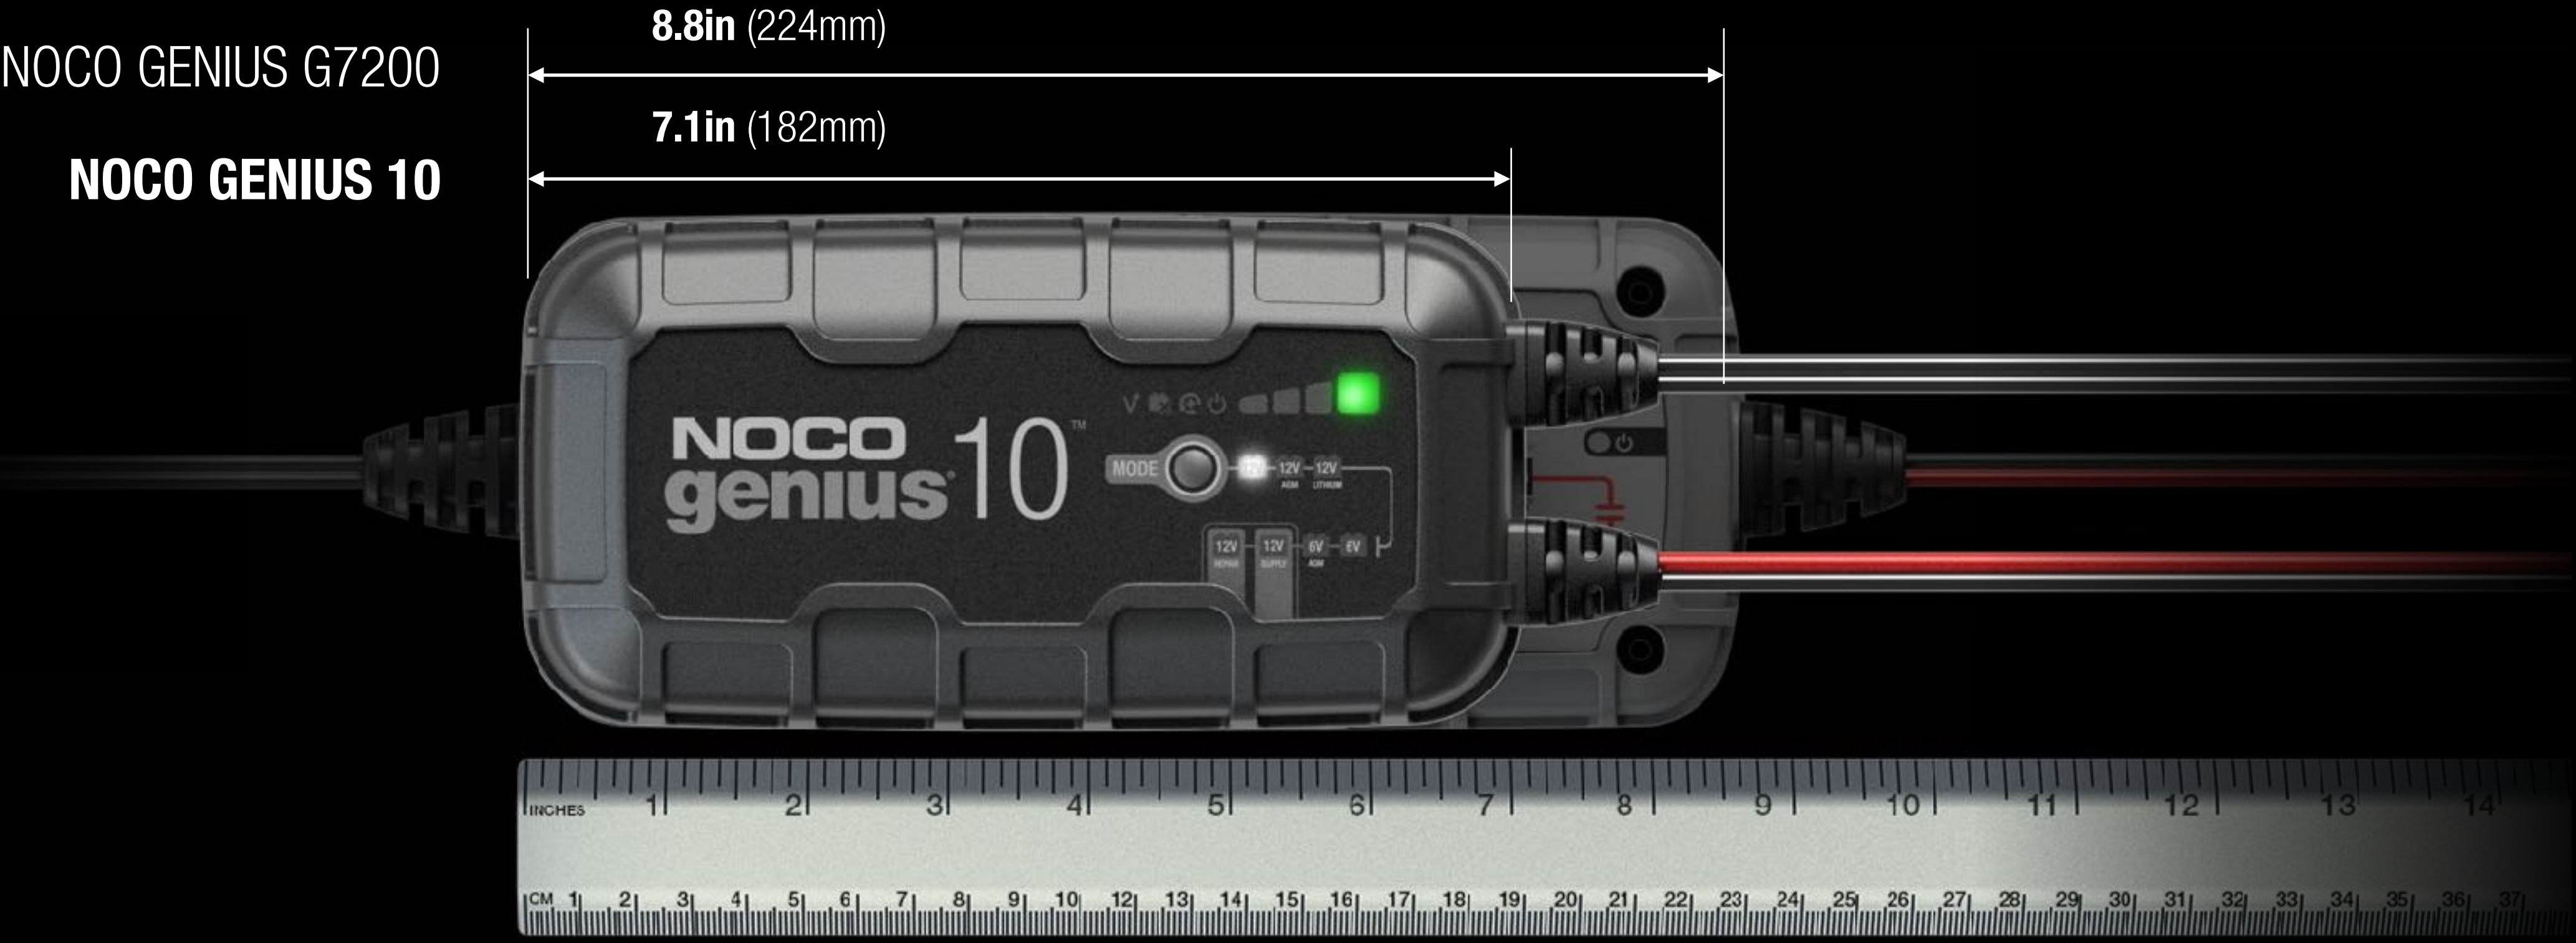

28%
MORE POWER

20%
SMALLER SIZE

REPAIR
CHARGE MODE

SMART
INDICATORS

