

SINGLE PACK

CTEK
MAXIMIZING BATTERY PERFORMANCE

56-825

12V 0.8A MXS 0.8 BATTERY CHARGER 6 STAGE CHARGE PROFILE



- Current: 0.8A DC
- Voltages: 12V
- Chemistry: Lead acid
- Types: WET, MF, CA, AGM, GEL
- Battery Capacity Range: 1.2-100Ah
- Operating temperature: -20°C to +50°C
- Dimensions: 280 x 150 x 50mm
- Weight: 0.6kg
- 5 Year warranty

Comes with:

- Eyelets M6, Clamps, User Guide



56-988

12V 3.8A MXS 3.8 BATTERY CHARGER 7 STAGE CHARGE PROFILE



- Current: 3.8A DC
- Voltages: 12V
- Chemistry: Lead acid
- Types: WET, MF, CA, AGM, GEL
- Battery Capacity Range: 1.2-130Ah
- Operating temperature: -20°C to +50°C
- Dimensions: 280 x 150 x 50mm
- Weight: 0.84kg
- 5 Year warranty

Comes with:

- Eyelets M6, Clamps, User Guide



56-987


12V 5A MXS 5.0 BATTERY CHARGER 8 STAGE CHARGE PROFILE



- Current: 5A DC
- Voltages: 12V
- Chemistry: Lead acid
- Types: WET, MF, CA, AGM, EFB, GEL
- Battery Capacity Range: 1.2-160Ah
- Operating temperature: -20°C to +50°C
- Dimensions: 280 x 150 x 50mm
- Weight: 0.84kg
- 5 Year warranty

Comes with:

- Eyelets M6, Clamps, User Guide

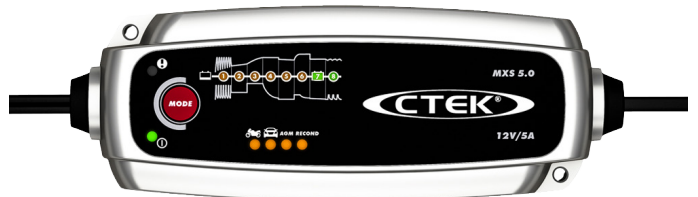

56-757

12V 7A MXS 7.0 BATTERY CHARGER & POWER SUPPLY



- Current: 7A DC
- Voltages: 12V
- Chemistry: Lead acid
- Types: WET, MF, CA, AGM, GEL
- Battery Capacity Range: 14-225Ah
- Operating temperature: -20°C to +50°C
- Dimensions: 280 x 190 x 60mm
- Weight: 1kg
- 5 Year warranty

Comes with:

- Eyelets M8, Clamps, User Guide

