

LV9402C

22" 120W LED LIGHT BAR

- 12 x 10W LEDs
- Combination 40°+10°+40° beam pattern
- Stainless steel mounting brackets w/ bottom rail mount
- Die cast aluminium housing
- Black powder coated finish
- Polycarbonate lens
- 200mm cable w/ DT connector
- RFI/EMC protection
- Operating temperature: -40°C to +60°C
- Current draw: 7.4A @ 12V



Bottom
Rail
Mount




Side
View


TITAN
SERIES



DIMENSIONS:

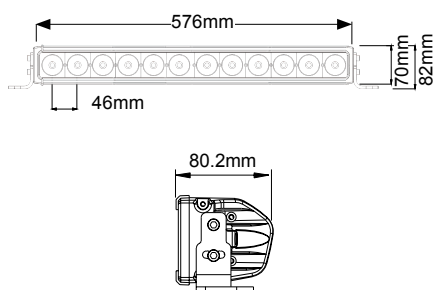

BEAM PATTERN:

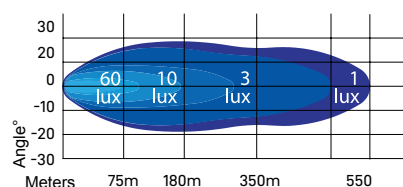

PRODUCT INFORMATION

LV9402S 10° Spot beam pattern

LVW-58S120W

23" 120W LED HEAVY DUTY DOUBLE ROW LIGHT BAR


- 24 x 5W LEDs
- Die-cast aluminium housing
- Polycarbonate lens
- Stainless steel mounting hardware
- Pre-wired cable
- Operating temperature: -40°C to +80°C
- Current draw: 10.0A @ 12V DC



WELDEX
CORPORATION



DIMENSIONS:

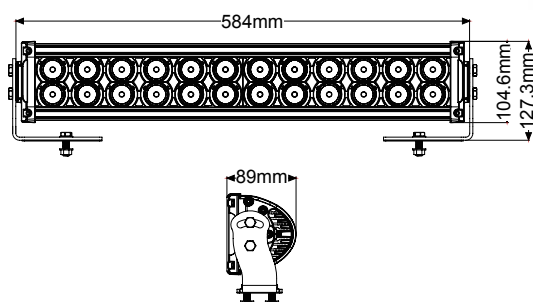

BEAM PATTERN:

