


LVW-4S40DT40

40W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 40° beam pattern
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -40°C to +80°C
- Current draw: 3.4A @ 12V DC

DIMENSIONS:



PRODUCT INFORMATION

LVW-4S40DT15


15° narrow beam

LVW-4S51DT60

50W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 60° beam pattern
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -40°C to +80°C
- Current draw: 4.2A @ 12V DC

DIMENSIONS:



PRODUCT INFORMATION

LVW-4S51DT20


20° narrow beam

LVW-8S60DT40-NPH

60W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 40° beam pattern
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -40°C to +80°C
- Current draw: 5.4A @ 12V DC

DIMENSIONS:

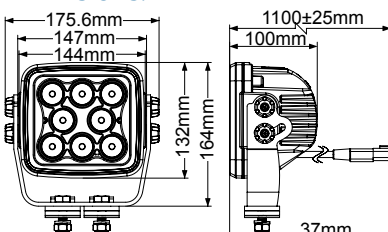

PRODUCT INFORMATION

LVW-8S60DT15-NPH

15° narrow beam