

NOCO genius[®] 5[™] CHARGER & MAINTAINER



GENIUS5AU

5A CHARGING CURRENT

6V & 12V

75W OUTPUT POWER

120Ah BATTERY CAPACITY


GENIUS CHARGERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE

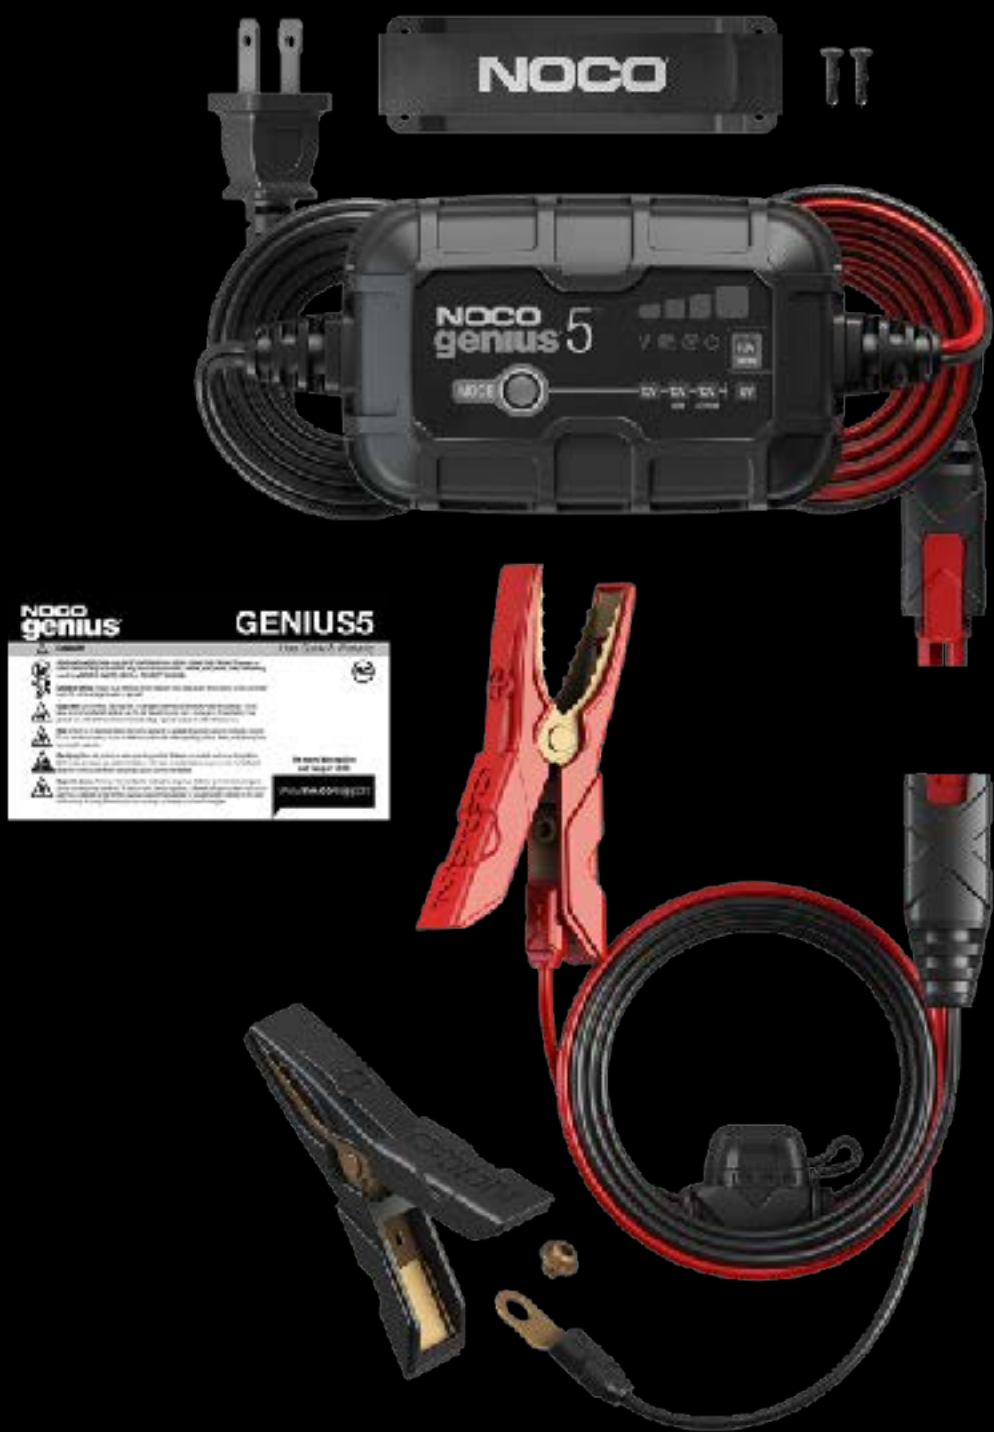

What's In The Box

- Genius 5 Battery Charger w/ Interchangeable Connector
- Clamps w/ Integrated Eyelets
- Mounting Bracket w/ Strap
- (2) Self-Tapping Screws
- User Guide & Warranty Information

Retail Packaging

Dimensions: 4.61" x 3.43" x 7.95"
Weight: 1.59
UPC: 0-46221-19004-5

Inner Carton:

Dimensions: 4.84" x 3.70" x 8.19"
Weight: 1.75lbs

Master Carton:

Dimensions: 17.10" x 11.97" x 5.51"
Weight: 11.31lbs
Quantity: 6
UCC: 10046221190042


Units Per Pallet:

252 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

GENIUS5AU

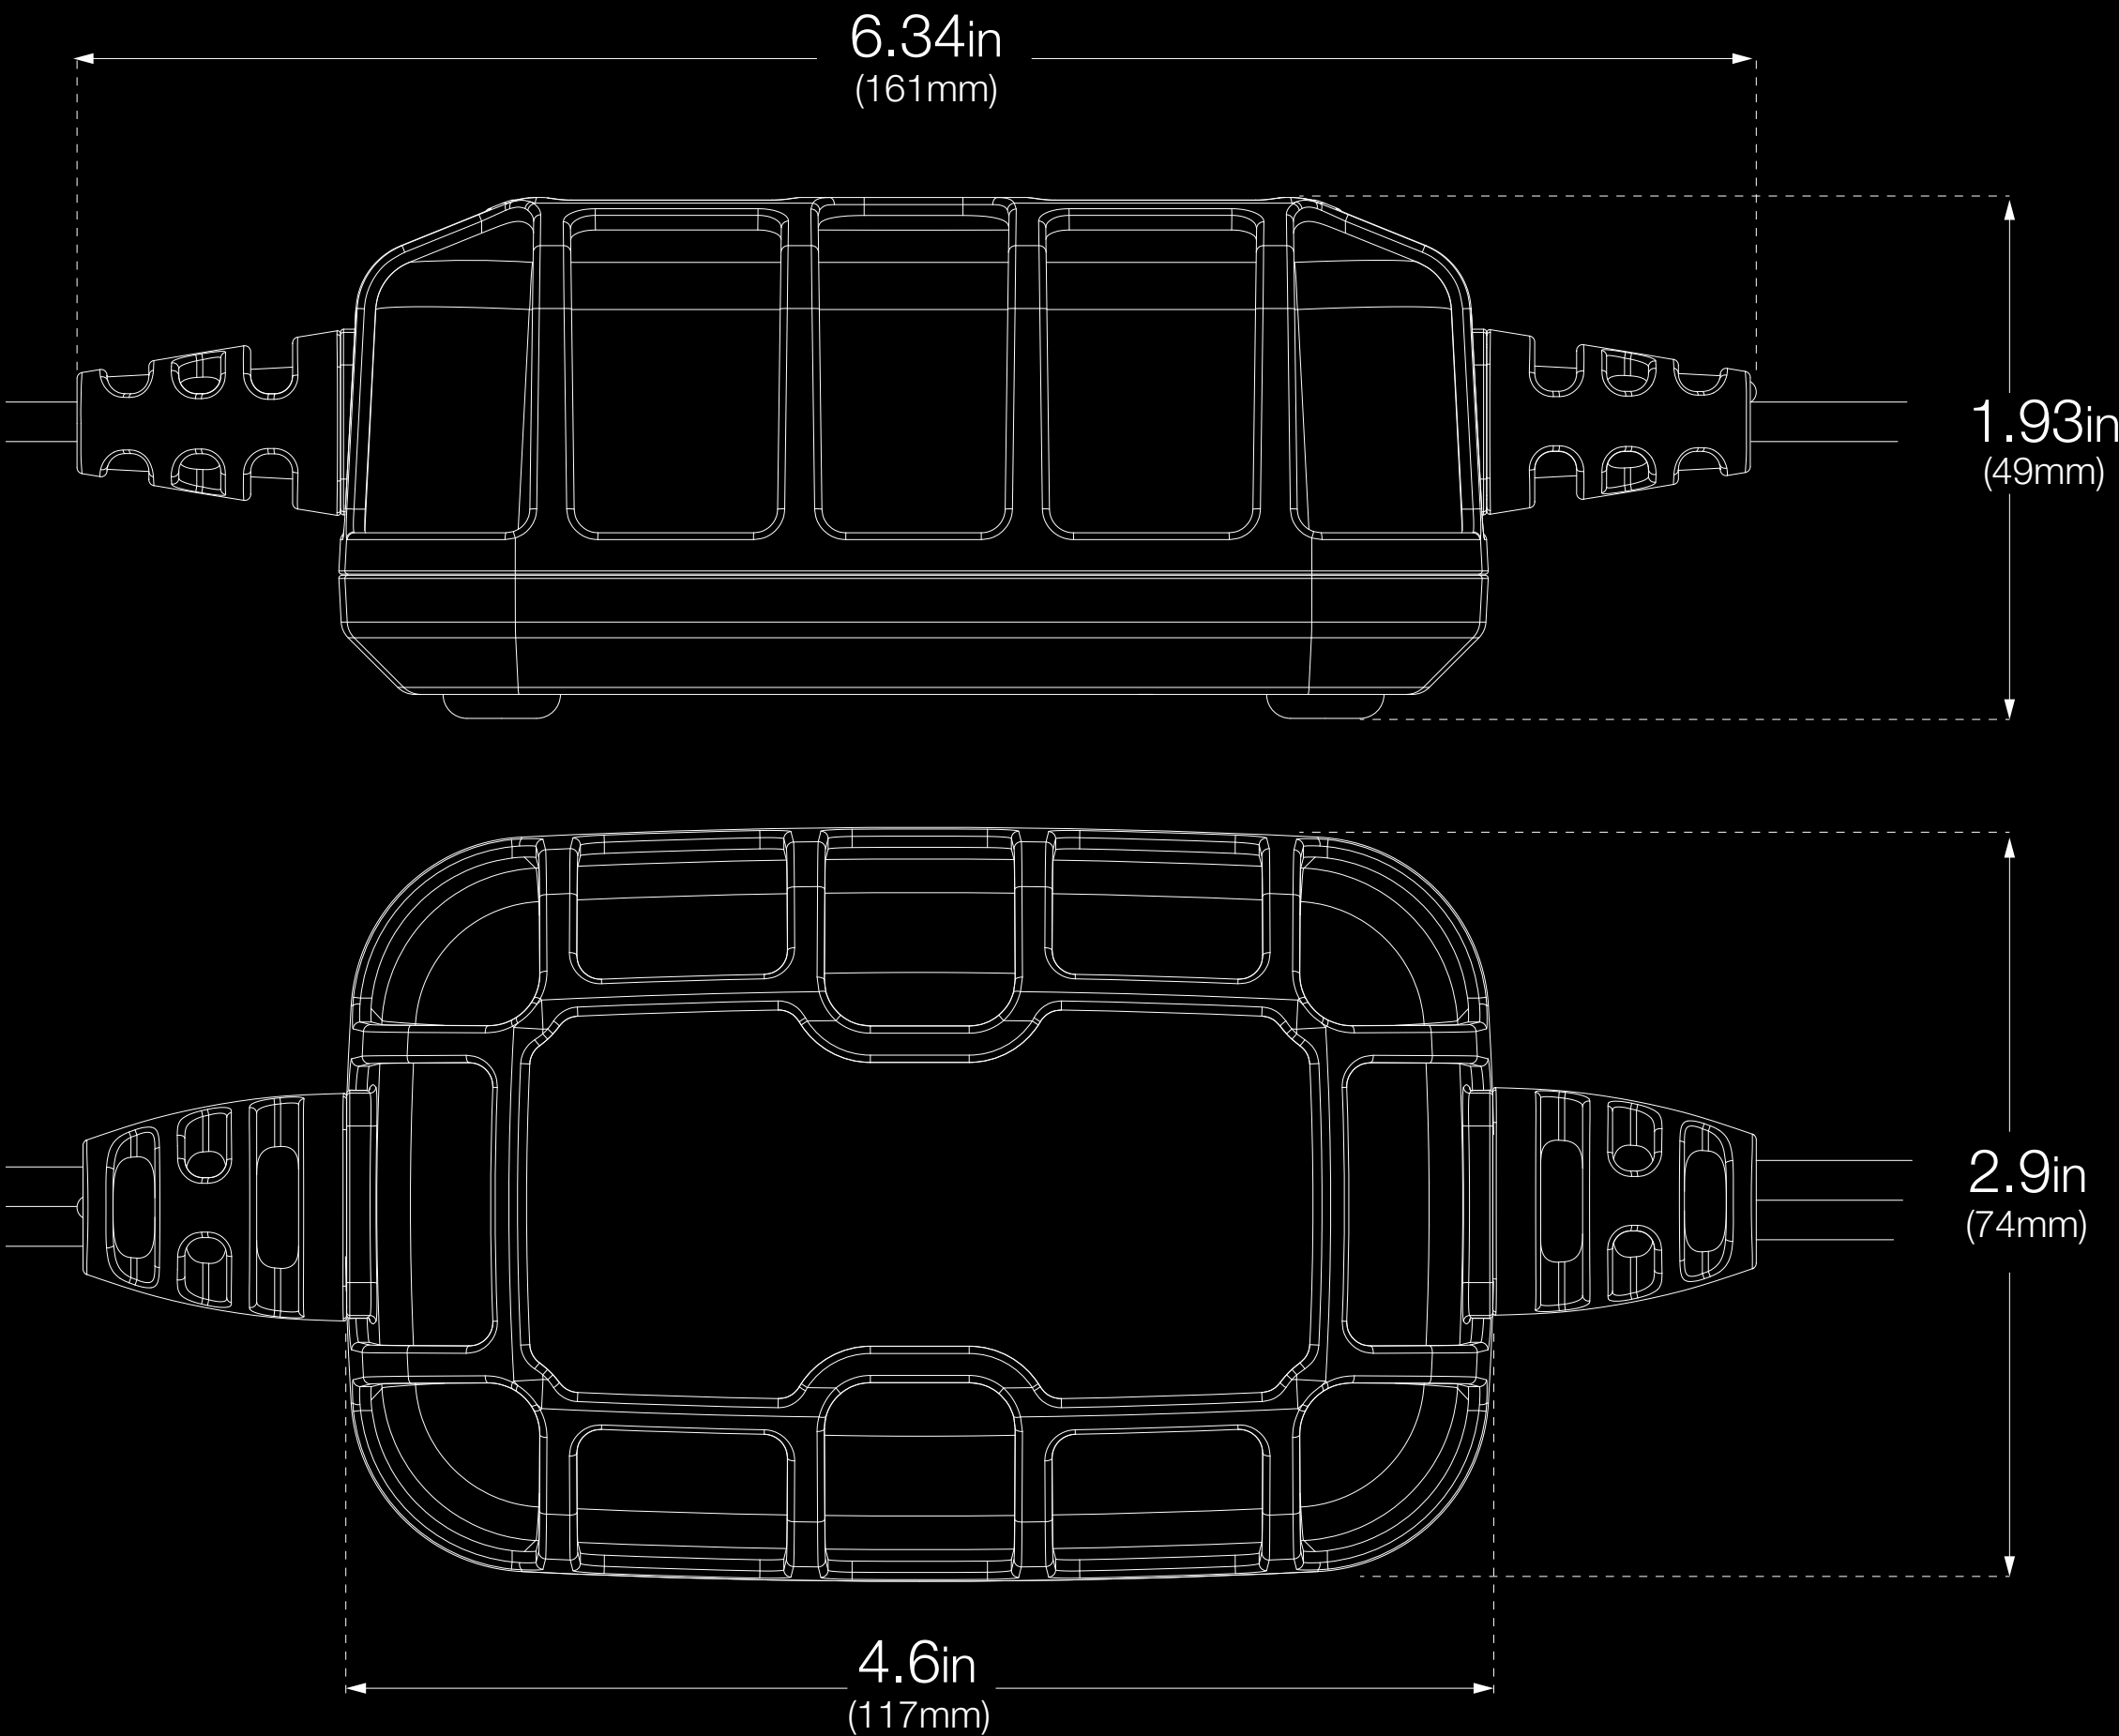

Operating Requirements

Line Voltage AC: 120V to 240V AC, 50-60Hz
Operating Temperature: -4° to 104° F (-20° to +40° C)
Storage Temperature: -22° to 140° F (-30° to +60° C)
Relative Humidity: 0 to 95% Non-Condensing

Charging

Current: 5 Amp DC
Voltages: 6V, 12V
Chemistry: Lead-Acid and Lithium
Types: Wet, Gel, MF, CA, EFB, AGM, Lithium
Battery Capacity Range: 2 Ah - 120 Ah
Maintenance: All Battery Sizes

Power

Output Power: 75 Watts (Max)
Efficiency: 86% (120VAC / 230VAC)

Protection

IP Rating: IP65

Safety

Short Circuit: Yes
Open-Circuit: Yes
Overheating: Yes
Overcharge: Yes
Spark-Proof Yes
Reverse Polarity: Yes

Size and Weight

Height: 4.6 Inches (117mm)
Width: 2.9 Inches (74mm)
Depth: 1.9 Inches (48mm)
Weight: 1.5 Pounds (0.68kg)

Cord Management

DC Cable Length: 77.6 Inches (197cm)
DC Cable Size: 16 AWG
DC Fuse Size: 10 AMP Micro Blade Fuse
AC Cable Length: 71.7 Inches (182cm)
AC Cable Size: 18 AWG
Oil, gas, grease, water, chemical, UV, abrasion resistant

Limited Warranty

3-Year Limited Warranty

Charging Times

Battery Size	Approx. Charge Time in Hours	
	6V	12V
20Ah	3	3
40Ah	6	6
80Ah	12	12
100Ah	15	15
120Ah	18	18


NOCO genius[®] 5[™] CHARGER COMPARISON

GENIUS5AU

NOCO GENIUS G3500
NOCO GENIUS 5

7.6in (193mm)

4.6in (117mm)

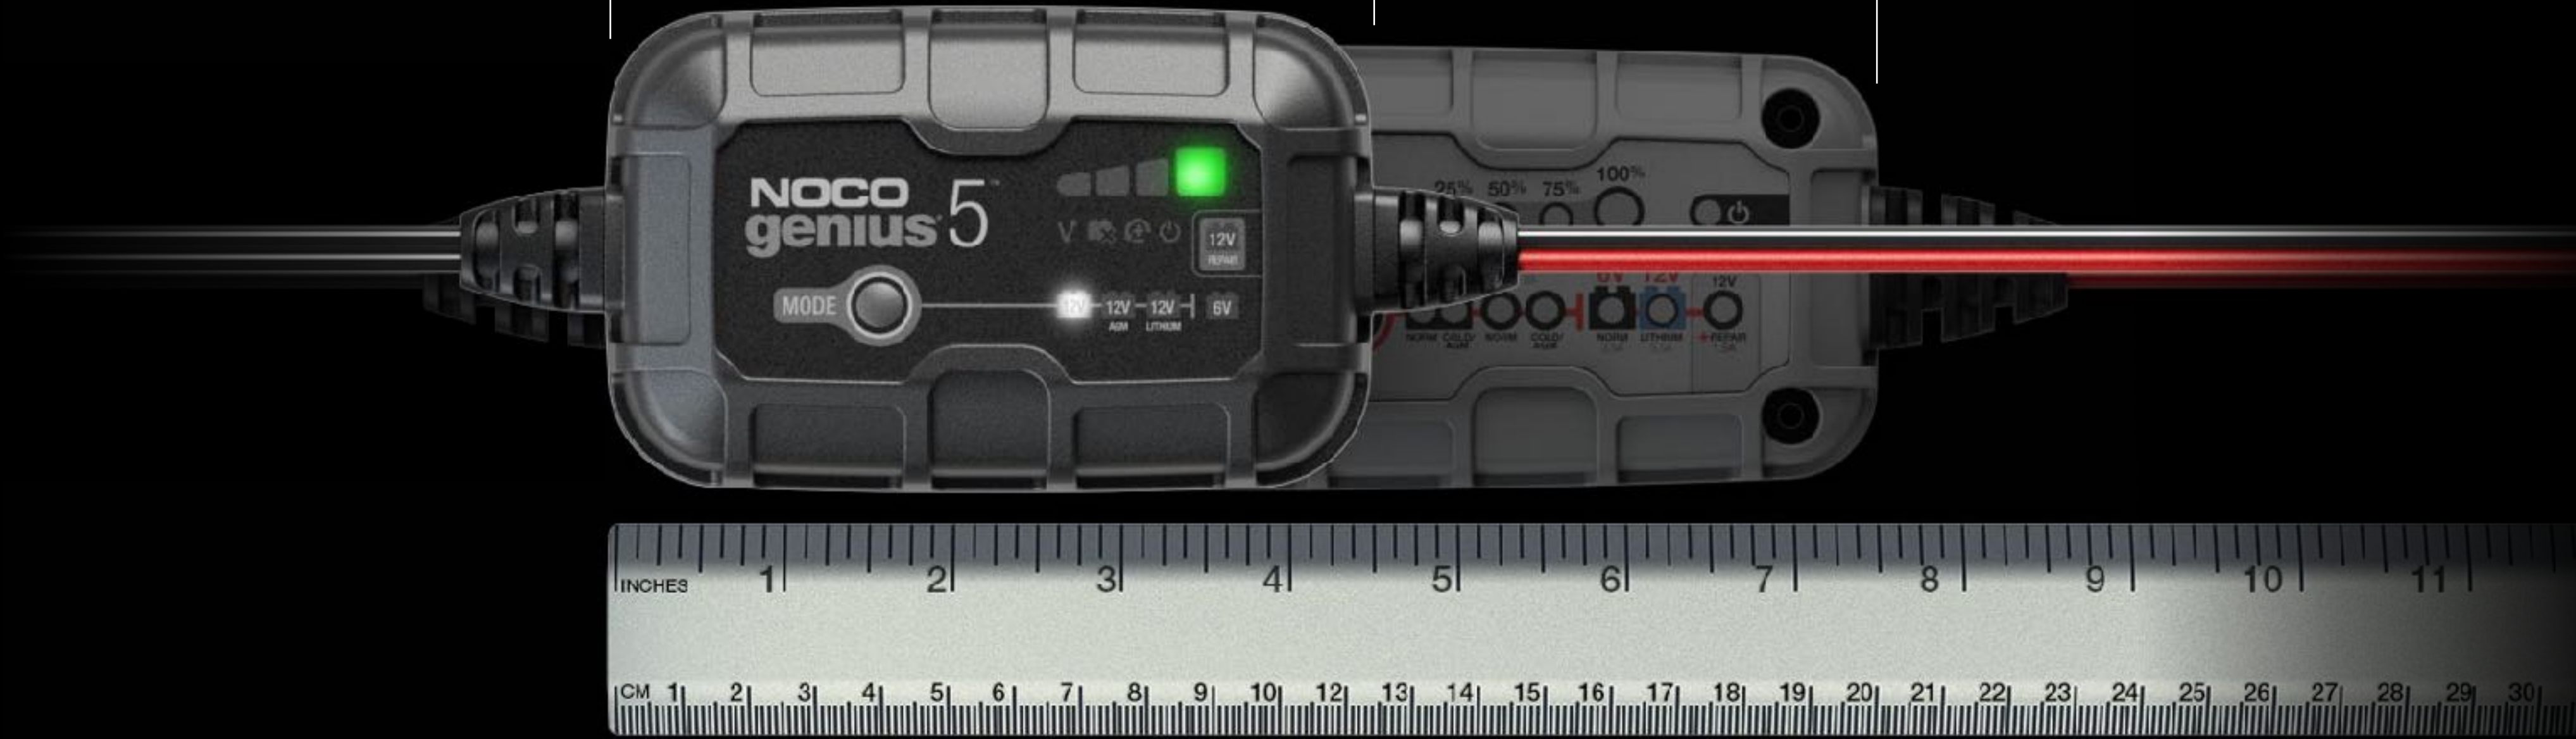

30%
MORE POWER

40%
SMALLER SIZE

REPAIR
CHARGE MODE

SMART
INDICATORS

