


LV5400

6 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Negative stud: M5
- Output terminal: 6 x M4
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Screw material: Stainless steel
- Red LED fault indicators
- Negative busbar
- Dimensions: 88(L) x 85(W) x 40(H)mm



SINGLE PACK




SINGLE PACK


LV5401

8 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Negative stud: M5
- Output terminal: 12 x M4
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Screw material: Stainless steel
- Red LED fault indicators
- Negative busbar
- Dimensions: Dimension: 138(L) x 85(W) x 40(H)mm

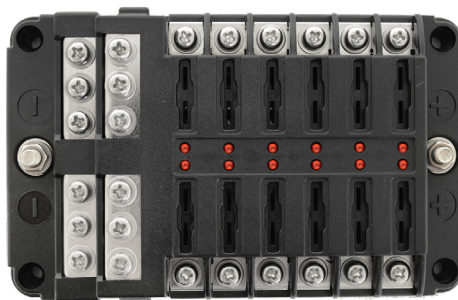


SINGLE PACK



LV5454

6 WAY ATS FUSE BLOCK DUAL +VE INPUTS

- Voltage rating: 32Vdc max.
- Current rating: 120A max.
- Input studs: 2 x M5
- Output terminal: 6 x M4
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Screw material: Stainless steel
- Red LED indicators
- Tall transparent cover
- Accepts plug-in type circuit breakers
- Negative busbar
- Dimensions: 132(L) x 118(W) x 60(H)mm



SINGLE PACK

