

LED Stop/Tail/Indicator/Reverse Lamps

BR170 SERIES



FEATURES

- Multi-volt 10-30V DC input & low current draw
- Brighter than conventional incandescent systems
- 100,000 hour LED life span with solid state technology
- Maintenance free
- Sealed polycarbonate lens & housing
- Water and dust proof
- Pre-wired with 300mm of sheathed tinned copper cable
- Flush recessed mount design
- Retro reflector integrated into BR170RR
- Available in clear or coloured lenses
- ADR/ECE approved for all functions



ROADVISION's BR170 Series round LED signal lamps are a versatile stand alone or combination lamp solution! Roadvision's super bright LED signal lamps deliver the durability of maintenance free LED technology and greater visibility, providing increased safety with minimum current draw. Couple this with virtually unbreakable polycarbonate lenses and housings, the BR170 Series will survive the toughest environments. The BR170's clever design enables it to be fitted as a recessed flush mount lamp, replacing existing 4" round grommet and 5.5" flange mount lamps. ROADVISION's new BR170 Series signal lamps produce more light output than incandescent lamps, whilst drawing a fraction of the current. They are dust & water proof and totally maintenance free, with a life span rated at 100,000 hours. With the ROADVISION BR170 Series, it's FIT and FORGET.

PART NUMBERS



BR170CR
Stop/Tail Lamp LED 10-30V 134mm Round Clear Lens



BR170R
Stop/Tail Lamp LED 10-30V 134mm Round Red Lens



BR170RR
Stop/Tail Lamp LED 10-30V 134mm Round Red Lens w/ Reflector



BR170A
Rear Indicator Lamp LED 10-30V 134mm Round Amber Lens



BR170CA
Rear Indicator Lamp LED 10-30V 134mm Round Clear Lens



BR170W
Reverse Lamp LED 10-30V 134mm Round Clear Lens





Shown fitted to optional triple bracket, available in black or chrome.

SPECIFICATIONS

	BR170CR	BR170R	BR170RR
Current Draw Amps	S/T - 0.05/ 0.05A @ 13.8V	S/T - 0.05/ 0.05A @ 13.8V	S/T - 0.05/ 0.05A @ 13.8V
Dimensions	130x32.8mm	130x32.8mm	130x32.8mm
Mounting Type	Recessed Mount	Recessed Mount	Recessed Mount
Mounting Hole / Cut Out	102mm	102mm	102mm
Lamps Functions	Stop/Tail	Stop/Tail	Stop/Tail
Number of LED's	Stop/Tail - 19 LED's	Stop/Tail - 19 LED's	Stop/Tail - 12 LED's
Cable Length	300mm Tinned Copper	300mm Tinned Copper	300mm Tinned Copper
Approvals	Stop - CRN 46759, Tail - CRN 46758	Stop - CRN 46766, Tail - CRN 46748	Stop - CRN 46760, Tail - CRN 46761, Reflector - ECE E4-3R-023490

SPECIFICATIONS

	BR170A	BR170CA	BR170W
Current Draw Amps	0.1A @ 13.8V	0.1A @ 13.8V	0.1A @ 13.8V
Dimensions	130x32.8mm	130x32.8mm	130x32.8mm
Mounting Depth	Recessed Mount	Recessed Mount	Recessed Mount
Mounting Hole / Cut Out	102mm	102mm	102mm
Lamp Functions	Rear Indicator	Rear Indicator	Reverse
Number of LED's	Indicator - 15 LED's	Indicator - 15 LED's	Reverse - 15 LED's
Cable Length	300mm Tinned Copper	300mm Tinned Copper	300mm Tinned Copper
Approvals	CRN 46744	CRN 46747	CRN 46746

LED Stop/Tail/Indicator/Reverse Lamps

SPARE PARTS & ACCESSORIES



BR12
LED Load Resistor 12V



BR1703B
Mounting Bracket Triple




BR24
LED Load Resistor 24V




BR1703C
Mounting Bracket Triple Chrome

LINE DIAGRAM - BR170 SERIES

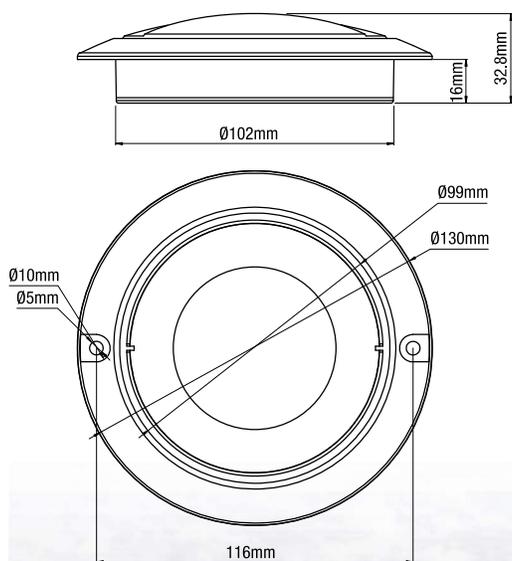

LINE DIAGRAM - TRIPLE BRACKET

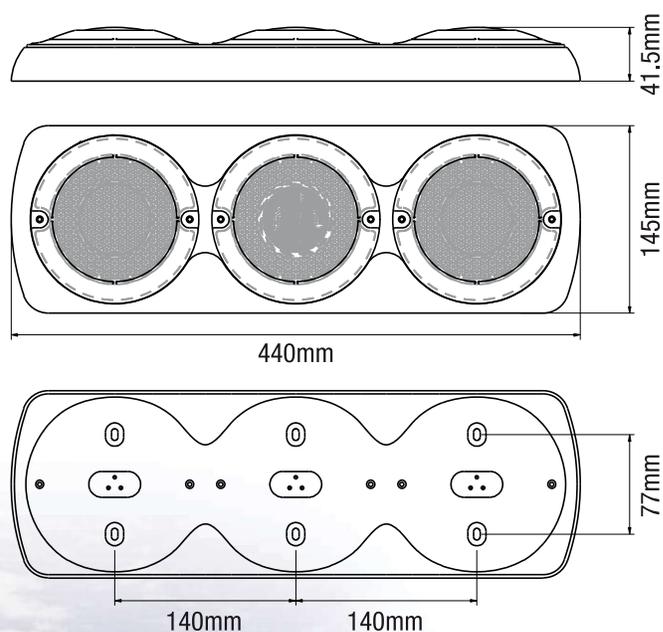

BR170 SERIES

