


It's **DENSO** **RELAX**



Long life.
Proven reliability.
The choice is easy.

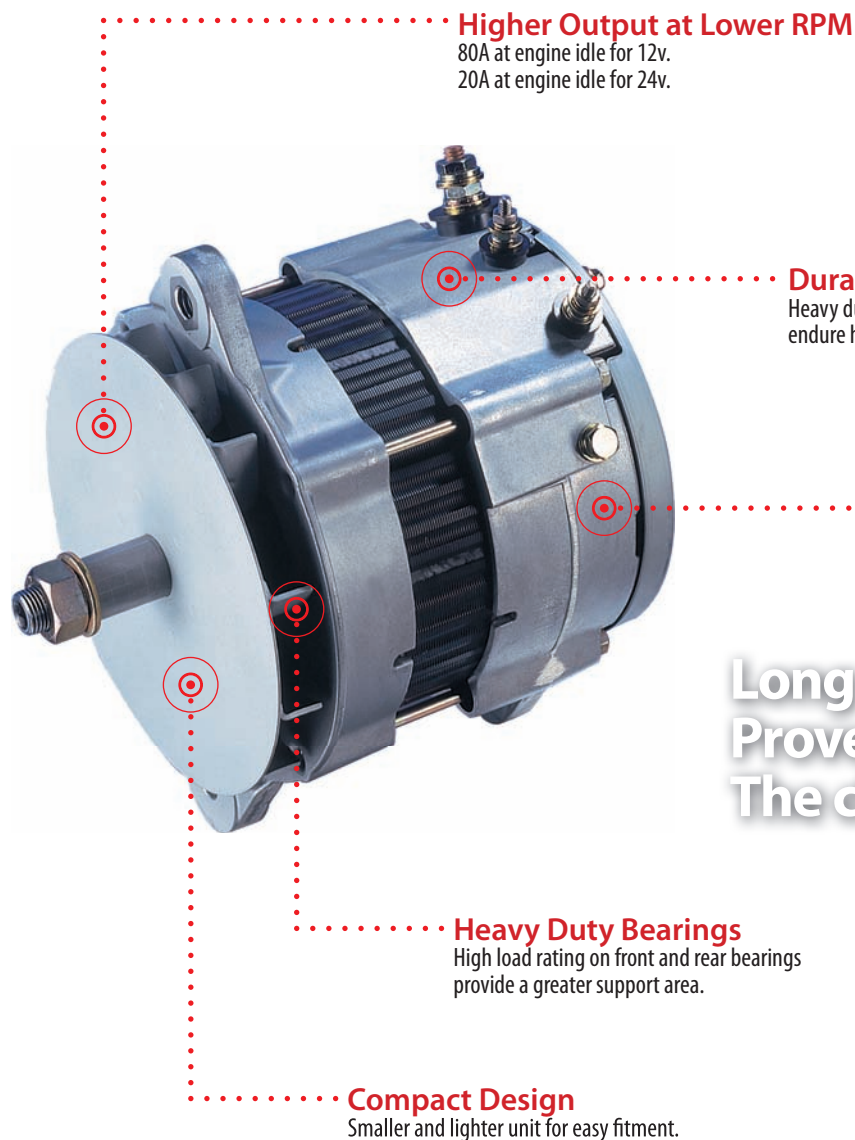

DENSO

ROTATING ELECTRICAL


It's DENSO, relax. Our alternators and starters are manufactured to stringent specifications, then tested to ensure quality and reliability so you don't have to worry about doing the same job twice. We can help improve your speed, efficiency and profitability so you can 'RELAX' knowing your vehicle is working as hard as you do.

Heavy Duty Brushless Alternator

SPECIFICATIONS

Rated Voltage & Output	80A at engine idle for 12v 20A at engine idle for 24v
Allowable Max Rpm	10,000 rpm
Allowable Belt Load	980N (100kgf) max
Polarity	Negative - case grounded
Rotation	Clockwise (viewed from pulley end)
Approximate Weight	10.39 kgs
Mount	SAE J180 and Pad mount
Advantages	- Heavy-duty front and rear bearings - Corrosion resistant rectifier and rotor - Non-soldered connections for easier service - One wire connection - Load dump protection

12V PERFORMANCE

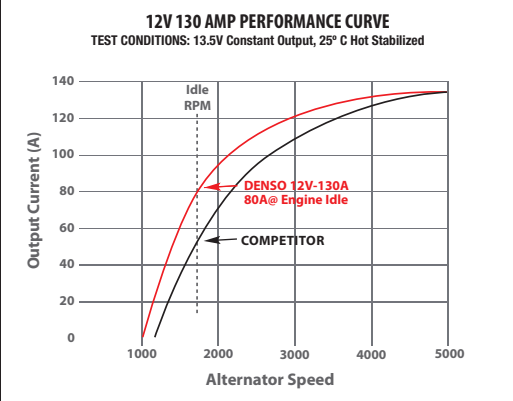


APPLICATIONS

	PART NUMBER	MOUNT	AMPERAGE	B-TERMINAL	R-TERMINAL	I-TERMINAL	REGULATOR
12 V	101211-8120	J180	130	5/16-18 UNC	3mm Pin	-	126000-2520
	101211-8060	J180	130	5/16-18 UNC	10-24 UNC	10-24 UNC	126000-2530
	101211-8380	Pad	130	5/16-18 UNC	10-24 UNC	10-24 UNC	126000-2520
	101211-8390	Pad	130	5/16-18 UNC	3mm Pin	-	126000-2520
24V	101211-8340	J180	95	5/16-18 UNC	3mm Pin	-	126000-2540
	101211-8400	Pad	95	5/16-18 UNC	3mm Pin	-	126000-2540
	101210-9000	J180	150	5/16-18 UNC	3mm pin	-	126000-2540
	101210-9010	Pad	150	5/16-18 UNC	3mm pin	-	126000-2540



24V 150 AMP PERFORMANCE

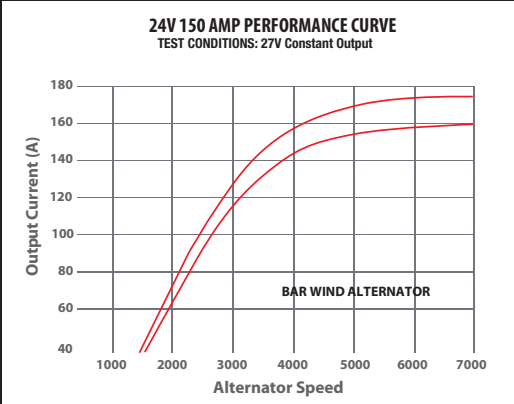

24V 95 AMP PERFORMANCE

