

LV9118

20" 100W LED CURVED LIGHT BAR & PARK LIGHT

- 10 x 10W LEDs (driving light), 5 x 1W LED (park light)
- Driving beam pattern
- Free form reflector design
- One piece polycarbonate lens
- Die cast aluminium housing
- Powder coated finish
- Sealed DT connector
- Electronic thermal management
- Dual mounting options
- Approved by ECE R112/R7/R10 (ref. 45)
- Colour temp: 6500°K
- Lumens: 9500 raw, 8075 effective
- Current draw @ 12V DC: driving beam: 6.5A, park beam: 0.2A



Dual Mounting Options




Vertical LED Park Light

TITAN
SERIES




DIMENSIONS:

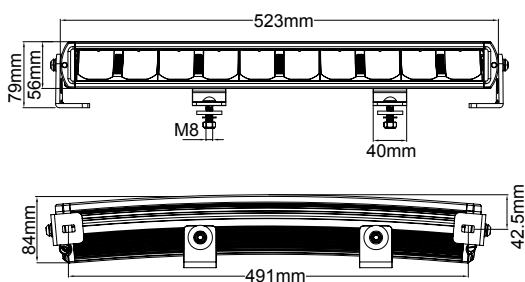

PREMIUM QUALITY



BEAM PATTERN:

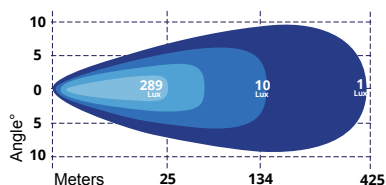

ZETA20

20" 32W LED LIGHT BAR


- 20 x 1.5 Osram® LEDs
- Combination beam pattern
- Colour temperature: 6000K
- EMC compliant
- 1 Lux: 239 metres
- Polycarbonate lens
- Die-cast aluminium housing
- Sealed DT connector
- Lumens: 3008 raw, 1981 effective
- Current draw: 1.3/2.7A
- Measurements: 508 x 74.5 x 51mm (inc. bracket)
- * Optional wiring loom available ZETA01) see page 186



ZETA



DIMENSIONS:

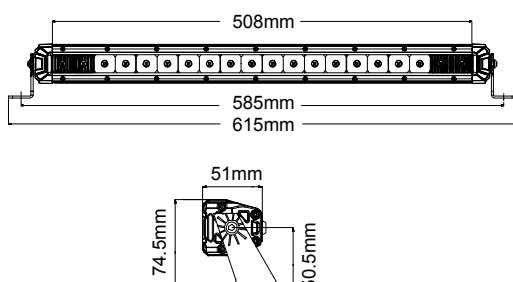

BEAM PATTERN:

