



LV182


Product Release

LV9119 31" LED **CURVED LIGHT BAR** & PARK LIGHT







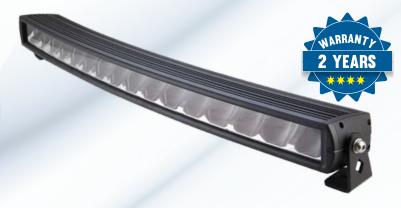


Features

- Free form reflector design
- One piece front cover
- Die cast aluminium housing
- Powder coated finish
- Sealed Deutsch connector
- Electronic Thermal Management
- Dual mounting options
- Approved by ECE R112/R7/R10 (Ref. 45)
- 2 Year Warranty


Specification

Wattage	160W
Input voltage	9-36V DC input
Current draw @ 12V	Driving Beam: 10.2A Park Beam: 0.4A
Colour temperature	6500°K
Raw lumens	15,200
Actual lumens	12,920
IP rating	IP68 & IP69K
LED Qty	16 x 10 Watt ETI [®] LED (Driving Light) 8 x 1 Watt LUXEON [®] LED (Park Light)
1 Lux	@ 480 Metres
Lens	Polycarbonate
Beam type	Driving Beam
Measurements	813 x 56 x 100mm

Driving Beam Pattern



Dimensions

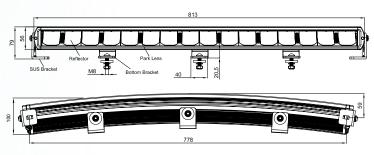

Page 1 of 1