

## FUEL PUMPS

SINGLE PACK




Facet

### LV6804

#### SOLID STATE 24V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 3/8" - 8 internal thread
- Dry lift: 305mm (12") min
- Shut off pressure: 4.5 - 9 PSI, LPH: 121.1
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

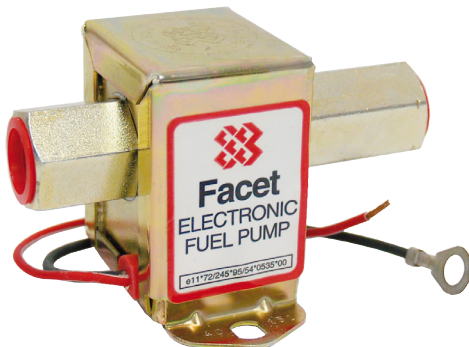


### LV6805

#### CYLINDRICAL SOLID STATE 12V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 8" - 27 internal thread
- Filter: Nylon, 74 micron filter, dry lift: 610mm (24") min
- Shut off pressure: 4.5 - 5 PSI, LPH: 136.6
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives

**Note:** Includes clamps & elbow fillings & nuts

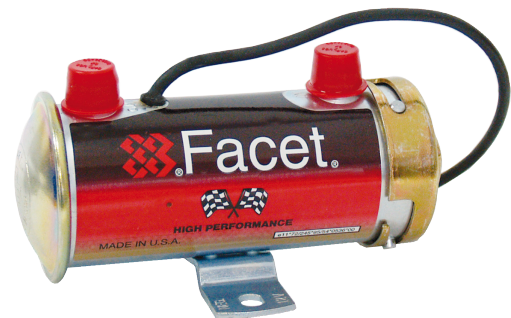

### LV6806

#### CYLINDRICAL SOLID STATE 24V UNIVERSAL FUEL PUMP



- Material: Stainless steel internal, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Filter: Nylon, 74 micron filter, dry lift: 610mm (24") min
- Shut off pressure: 4 - 5 PSI, LPH: 121.1
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives



### LV6807

#### SOLID STATE POSI-FLO 12V UNIVERSAL FUEL PUMP & FITTINGS KIT



- Material: Composite plastic housing, 2 x wire
- Fitting type: 1/8" - 27 internal thread
- Fitting: Straight ID - 8mm (5/16")
- Dry lift: 305mm (12") min
- Shut off pressure: 1.5 - 4 PSI, LPH: 87
- Operating temperature: + 4°C to + 82°C
- Application: Universal, petrol, diesel, biodiesel blended alcohol & fuel additives
- 3.5A Internal fuse

