


FEATURES

- Stop/Tail Indicator or Stop/Tail Indicator & Reverse functions
- Sequential Indicator
- Grey Glowtech tail light
- Integrated Retro Reflector
- Multi-volt 10-30V DC input & low current draw
- 100,000HR rated LED lifespan with solid state technology
- Simple surface mount design
- ADR approved for all functions
- Light weight tough polycarbonate housing & lens
- Mild tinted lens and gun metal grey chrome finish

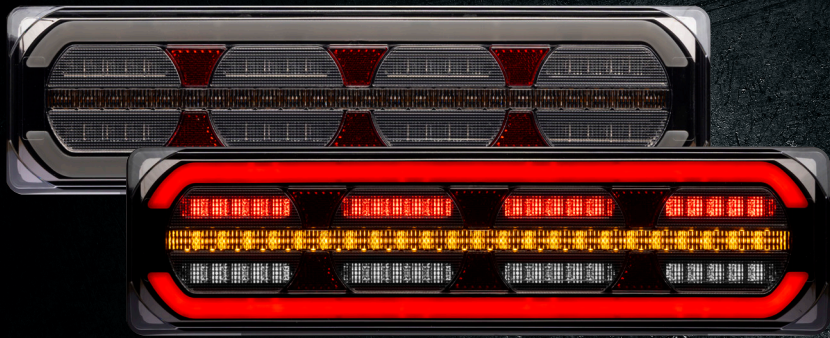

LED COMBINATION LAMPS

MULTI-VOLT
10-30 VDC

PC
POLYCARB
LENS

PC
POLYCARB
HOUSING

IP67
WATERPROOF

ADR
APPROVED

SEQUENTIAL
INDICATOR

GLOW TAIL
LIGHT

5YR
WARRANTY

ROADVISION's BR392 Series provides a premium lighting solution, combining Stop, Tail, Indicator, and Reverse functions with the added sophistication of a sequential indicator and Grey Glowtech tail light. Engineered for safety and style, these advanced LED lamps deliver exceptional brightness and an extended lifespan of up to 100,000 hours with reliable solid-state technology. The BR392 Series is ADR-approved for all functions and built tough with a lightweight polycarbonate housing and lens. Its mild tinted lens and gun metal grey chrome finish create a sleek, modern aesthetic, while the integrated retro reflector enhances visibility. Designed for versatility and effortless installation, the BR392 Series is the ideal choice wherever combination lamps are needed.

PART NUMBERS

BR392ARR
LED Rear Combination Lamp 10-30V Stop/Tail/Ind/Ref
Glowtech Tail 390x105x39mm

PART NUMBERS

BR392ARW
LED Rear Combination Lamp 10-30V Stop/Tail/Ind/Rev/Ref
Glowtech Tail 390x105x39mm

SPECIFICATIONS	BR392ARR	BR392ARW
INPUT VOLTAGE	10-30 VDC	10-30 VDC
NUMBER OF LEDs	Indicator - 24 LEDs, Stop - 40 LEDs, Tail - 54 LEDs	Indicator - 24 LEDs, Stop - 20 LEDs, Tail - 54 LEDs, Reverse - 20 LEDs
CURRENT DRAW @ 13.8V	Ind - 0.37A, Stop - 0.27A, Tail - 0.18A @ 13.8V	Ind - 0.35A, Stop - 0.21A, Tail - 0.18A, Rev - 0.2A @ 13.8V
LENS CONSTRUCTION	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Polycarbonate	Polycarbonate
MOUNTING HOLE CENTRES	185-225mm	185-225mm
OVERALL DIMENSIONS	390 x 105 x 39mm	390 x 105 x 39mm
CABLE LENGTH	300mm Tinned Copper	300mm Tinned Copper
CTA APPROVAL	CTA-061826	CTA-061827
WIRING	Earth - White, Stop - Red, Tail - Brown, Indicator Left - Yellow, Indicator Right - Green	Earth - White, Stop - Red, Tail - Brown, Indicator Left - Yellow, Indicator Right - Green Reverse - Black

LINE DIAGRAM

