


LVW-8S61DT40-NPH

60W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 40° beam pattern
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -40°C to +80°C
- Current draw: 5.4A @ 12V DC

DIMENSIONS:

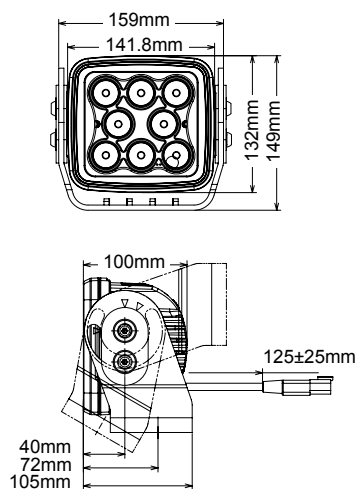

WELDEX
CORPORATION



PRODUCT INFORMATION

LVW-8S61DT15-NPH 15° narrow beam


LVW-8S61DT25-NPH 25° narrow beam

LVW-8S80DT75-NPH

80W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 75° beam pattern
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -40°C to +80°C
- Current draw: 6.7A @ 12V DC

DIMENSIONS:

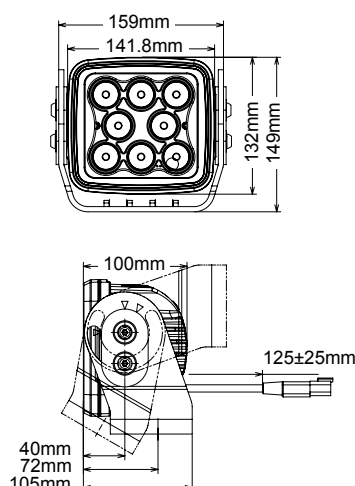

WELDEX
CORPORATION



PRODUCT INFORMATION

LVW-8S80DT15-NPH 15° narrow beam

LVW-8S80DT25-NPH 25° narrow beam

LVW-8S80DT40-NPH 40° wide beam