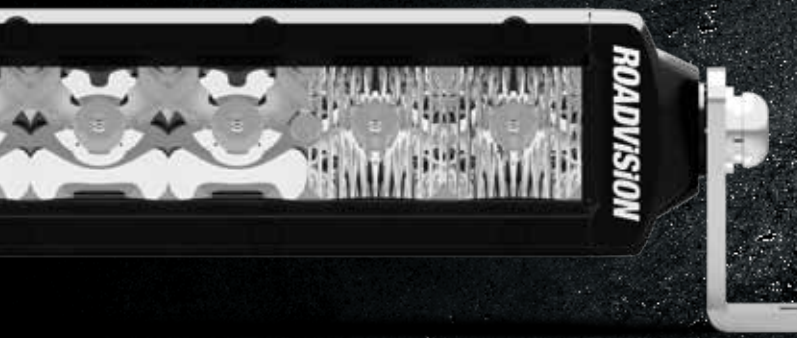




FEATURES

- SRE2 Series single row LED bar lights produce up to 12295lm of instant light output
- Available in 12", 22", 32" models
- 5W Osram LED's produce super white light close to daylight
- Multi-volt 11-32V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal management technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP68 rated
- Simple 2 wire installation with Deutsch plug
- Low profile slide & end mounts
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED LIGHT BARS

THERMAL
MANAGEMENT
TECHNOLOGYMULTI-VOLT
11-32 VDCPOLYCARB
LENSCOLOUR
TEMP

WATERPROOF

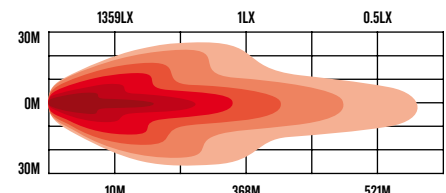
OVER/UNDER
VOLTAGE
PROTECTIONREVERSE
POLARITY
PROTECTIONDEUTSCH
CONNECTOROSRAM
LED'SEMI/EMC
RADIO
INTERFERENCE
APPROVED3 YEAR
WARRANTY

The Roadvision Essentials SRE2 Series LED bar lights are the ideal choice for those chasing value for money without compromising on quality. Utilising high performing 5W Osram LED's, Thermal Management Technology, packaged in an IP68 rated housing and shielded behind a polycarbonate lens, these bar lights are built to endure the toughest conditions. The Essentials Series single row LED bar lights produce up to 12295lm of instant light output. With the perfect combination of spot and driving optics, they produce combination style beam patterns reaching up to 650 meters @ 1 LUX. Available in the most common 12", 22" & 32" lengths, they are a perfect entry level solution while still providing great output, durability and the perfect look for your rig.

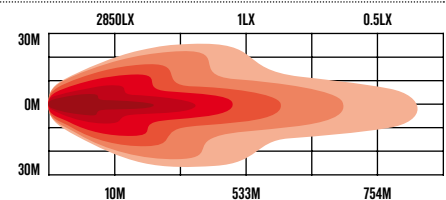
PART NUMBERS



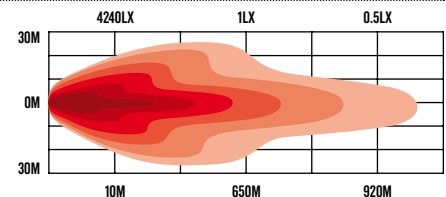
RBL3121C

12" LED Bar Light 11-32V 50W
Combination Beam

RBL3221C

22" LED Bar Light 11-32V 90W
Combination Beam

RBL3321C

32" LED Bar Light 11-32V 140W
Combination Beam



SPECIFICATIONS	RBL3121C	RBL3221C	RBL3321C
BEAM PATTERN	Combination	Combination	Combination
MAXIMUM LUMENS	4528lm	7955lm	12295lm
MAXIMUM LUX @ 10M	1359lx	2850lx	4240lx
MAXIMUM BEAM DISTANCE @ 1LX	368m	533m	650m
INPUT VOLTAGE	11-32VDC	11-32VDC	11-32VDC
MAXIMUM WATTS	50W	90W	140W
NUMBER OF LEDS	10 x 5W Osram	20 x 5W Osram	30 x 5W Osram
CURRENT DRAW @ 13.8V	3.47 Amps	6.25 Amps	9.72 Amps
LENS CONSTRUCTION	Polycarbonate	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium	Die-Cast Aluminium	Die-Cast Aluminium
WIRING	2 Pin Deutsch Plug	2 Pin Deutsch Plug	2 Pin Deutsch Plug
DIMENSIONS AXBXC	358 x 61 x 60mm	612 x 61 x 60mm	867 x 61 x 60mm

LINE DIAGRAM

