


## LV0132

### 40W LED WORK LIGHT FLOOD BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 40° beam pattern
- Stainless steel mounting hardware
- Silicone cable w/ DT connector
- Operating temperature: -40°C to +60°C
- Current draw: 3.3A @ 12V DC

#### DIMENSIONS:

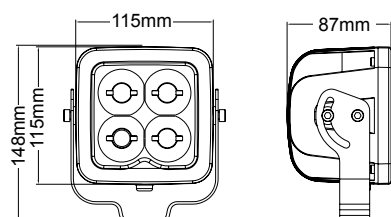

#### PRODUCT INFORMATION


**LV0132F** 60° wide Flood

## LV0132S

### 40W LED WORK LIGHT SPOT BEAM

- Die-cast aluminium housing
- Polycarbonate lens
- 10° beam pattern
- Stainless steel mounting hardware
- Silicone cable w/ DT connector
- Operating temperature: -40°C to +60°C
- Current draw: 3.3A @ 12V DC

#### DIMENSIONS:

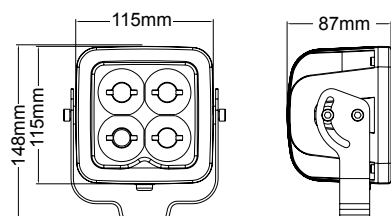

## LV0126F

### 40W LED WORK LIGHT FLOOD BEAM

- Integrated weather proof push button switch, retractable handle
- Die-cast aluminium housing
- Polycarbonate lens
- 40° beam pattern
- Stainless steel mounting hardware
- Operating temperature: -50°C to +80°C
- Current draw: 3.3A @ 12V DC

#### DIMENSIONS:

