

## EMERGENCY STOP SWITCHES

SINGLE PACK

### LV5021 NO/NC E-STOP SWITCH WITH LEGEND PLATE



- Material: Polycarbonate
- Contacts: NO/NC
- Latching/twist to reset
- Rating: 600Vac / 10A
- IP rating: IP65
- Housing dimensions: 74 x 74 x 57(H)mm
- Mounting hole ctn to ctn: 53mm



### LV5045 NC/NC E-STOP SWITCH WITH LEGEND PLATE



- Material: Polycarbonate
- Contacts: 2 x N/C (3A @ 240Vac)
- Latching/twist to reset
- Rating: 600Vac
- IP rating: IP65
- Operating temperature: -25°C to +70°C
- Dimensions: 66.6 (W) x 66.5 (D) x 90mm Max (H)



### LV5018 NC/NO E-STOP SWITCH WITH LEGEND PLATE



- Material: Polycarbonate
- Contacts: 1 x N/O, 1 x N/C (3A @ 240Vac)
- Latching/twist to reset
- Rating: 600Vac
- IP rating: IP65
- Operating temperature: -25°C to +70°C
- Dimensions: 66.6 (W) x 66.5 (D) x 90mm Max (H)



### LV5024 NO/NC FOOT & PALM E-STOP SWITCH PUSH/PULL TO RELEASE FUNCTION



**EATON**


- Durable impact resistant housing
- Contacts: NO/NC
- Current rating: 6A@230Vac; 3A@24Vdc
- Screw termination, M20 cable entries
- Tamper-proof to ISO 13850/EN 418
- Operating temperature: -25°C to +55°C
- IP rating: IP69K
- Mushroom head: Ø94mm
- Dimensions: 85 x 85 x 101(H)mm



### LV5031 NC/NO METAL CASE E-STOP SWITCH WITH LEGEND PLATE



- Material: Metal
- Contacts: 1 x N/O, 1 x N/C (3A @ 240Vac)
- Latching/twist to reset
- Operating temperature: -25°C to +70°C
- Dimensions: 72 (W) x 74.5 (D) x 82mm Max (H)

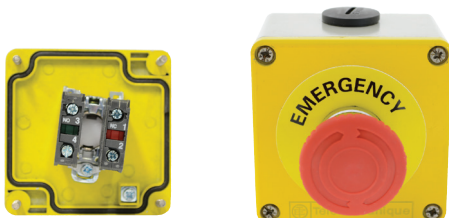

### LV5099 NO/NC METAL CASE E-STOP SWITCH SPRING RETURN



- Material: Metal
- Contacts: NO/NC
- Spring return
- Operating temperature: -25°C to +70°C
- Dimensions: 72 (W) x 74.5 (D) x 82mm Max (H)

