


LV9126

20" 180W DOUBLE ROW LED LIGHT BAR

- 36 x 5W LEDs
- Free form reflector design
- One piece polycarbonate lens
- Die cast aluminium housing
- Powder coated finish
- Sealed DT connector
- Electronic thermal management
- Dual mounting options
- Approved by ECE R10/R12 (ref. 50)
- Colour temp: 6000°K
- Lumens: 16400 raw, 14,000 effective
- Current draw: 12.5A @12V DC



Dual
Mounting
Options




Double
Row


TITAN
SERIES



DIMENSIONS:

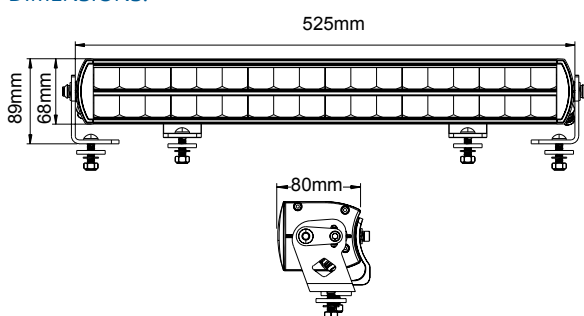

BEAM PATTERN:



LV0189C

20" 240W LED LIGHT BAR DOUBLE ROW

- 24 x 10W LEDs
- Combination 40°+10°+40° beam pattern
- Stainless steel mounting brackets w/ bottom rail mount
- Die cast aluminium housing
- Black powder coated finish
- Polycarbonate lens
- 200mm cable w/ DT connector
- RFI/EMC protection
- Operating temperature: -40°C to +60°C
- Current draw: 18.8A @ 12V



Bottom
Rail
Mount




Side
View

TITAN
SERIES



DIMENSIONS:

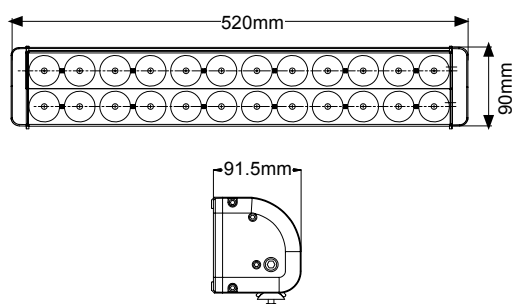

BEAM PATTERN:

