

12V MINI RELAYS




SINGLE PACK

LV4515

12V/30A 4 PIN FUSED MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 30A
- Silver contacts
- Resistor protected
- 30A ATS blade fuse
- Removable bracket
- Operating temperature: -40°C to +80°C
- No. of pins: 4

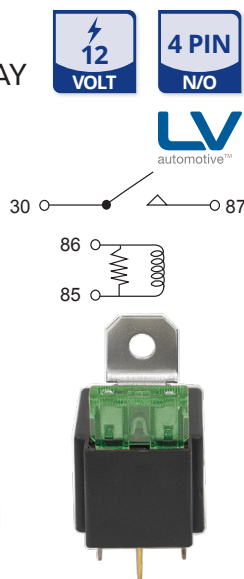

LV4527

12V/40A 4 PIN MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 40A
- Silver contacts
- Resistor protected
- Removable bracket
- Operating temperature: -40°C to +125°C
- No. of pins: 4

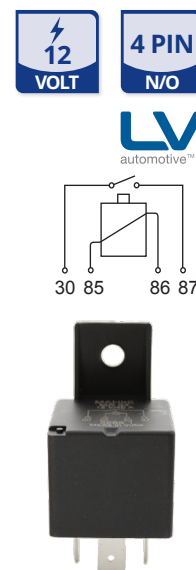

LV4535

12V/30A 4 PIN MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 40A
- Silver contacts
- Parallel pins
- Resistor protected
- Includes mounting bracket
- Operating temperature: -40°C to +85°C
- No. of pins: 4

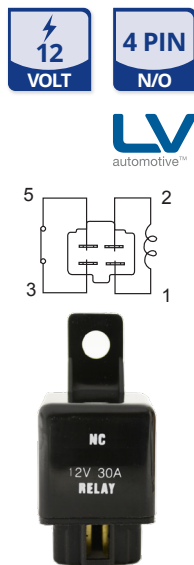

LV4536

12V/40A 4 PIN MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 40A
- Silver contacts
- Resistor protected
- Includes mounting bracket
- Operating temperature: -40°C to +125°C
- No. of pins: 4
- Reversed terminals between 30 & 86
- Applications: Ford & GM
- Reference: 0 332 019 457

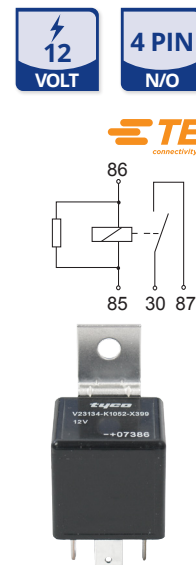

LV4537

12V/40A 4 PIN MINI RELAY
SPST N/O CIRCUIT


- Voltage: 12V
- Amperage: 40A
- Silver contacts
- Resistor protected
- Operating temperature: -40°C to +125°C
- No. of pins: 4
- Reversed terminals between 30 & 86
- Applications: Ford & GM
- Reference: 0 332 019 457

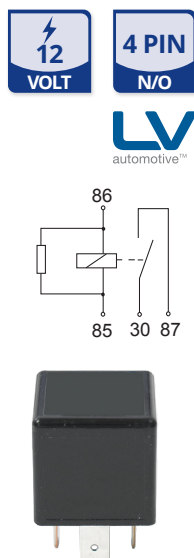

0332019457

12V/40A 4 PIN MINI RELAY
SPST N/O CIRCUIT

- Voltage: 12V
- Amperage: 40A
- Silver contacts
- Resistor protected
- Operating temperature: -40°C to +125°C
- No. of pins: 4
- Reversed terminals between 30 & 86
- Applications: Ford & GM

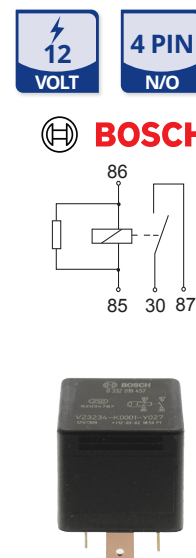

BOSCH