


## BRAIDED EXPANDABLE SLEEVING

- Material: PET monofilament
- Melting point: 250°C ± 5°C
- Operating temperature: -50°C to +150°C
- Rating: UL94V
- Colour: Black
- Pack in spool



SPOOL

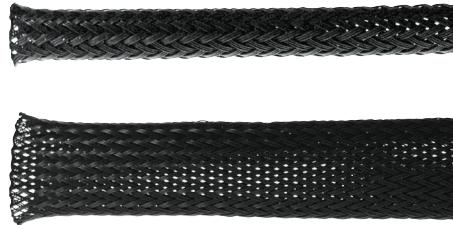

### PRODUCT INFORMATION

| Part No.   | Normal Size | Max. Dia. | Length |
|------------|-------------|-----------|--------|
| LV3370/100 | 3mm         | 6.4mm     | 100m   |
| LV3371/100 | 6mm         | 11.1mm    | 100m   |
| LV3372/100 | 9mm         | 15.9mm    | 100m   |
| LV3373/100 | 16mm        | 25.4mm    | 100m   |
| LV3374/100 | 19mm        | 31.8mm    | 100m   |

## BRAIDED EXPANDABLE SLEEVING IN DISPENSER BOX

- Material: PET monofilament
- Melting point: 250°C ± 5°C
- Operating temperature: -50°C to +150°C
- Rating: UL94V
- Colour: Black
- Pack in dispenser box



DISPENSER BOX



### PRODUCT INFORMATION

| Part No. | Normal Size | Max. Dia. | Length |
|----------|-------------|-----------|--------|
| LV3370   | 3mm         | 6.4mm     | 15m    |
| LV3371   | 6mm         | 11.1mm    | 12m    |
| LV3372   | 9mm         | 15.9mm    | 10m    |
| LV3373   | 16mm        | 25.4mm    | 5m     |
| LV3374   | 19mm        | 31.8mm    | 5m     |