

## 90° CABLE LUG INSULATORS


- Meets & exceeds industry standards
- Designed to protect right angle cable lugs in tight/confined space
- Prevents accidental short circuiting at the terminals or studs
- PVC material
- Provides flexible cable entry
- Melting temperature: 157 - 168°C
- Pack of 5



PACK OF 5



\* For illustration only

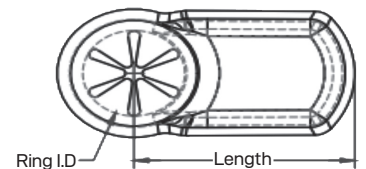

### PRODUCT INFORMATION


| Part No. | Ring I.D | Length  | Cable Size | Suits 90° Lug | Colour |
|----------|----------|---------|------------|---------------|--------|
| LV2487   | 16.97mm  | 36.64mm | 1 - 2 B&S  | LV4174-LV4175 | Black  |
| LV2487R  | 16.97mm  | 36.64mm | 1 - 2 B&S  | LV4174-LV4175 | Red    |
| LV2488   | 19.12mm  | 39.83mm | 0 B&S      | LV4164-LV4165 | Black  |
| LV2488R  | 19.12mm  | 39.83mm | 0 B&S      | LV4164-LV4165 | Red    |
| LV2489   | 17.98mm  | 40.2mm  | 00 B&S     | LV4166-LV4168 | Black  |
| LV2489R  | 17.98mm  | 40.2mm  | 00 B&S     | LV4166-LV4168 | Red    |

## WINGNUT BATTERY TERMINAL INSULATORS

- Bolt on wingnut terminals
- Meets & exceeds industry standards
- Designed to protect ring, lug & battery terminals
- Prevents accidental short circuiting at the terminals or studs
- PVC material
- Temperature rating 105°C
- Pack of 5



PACK OF 5

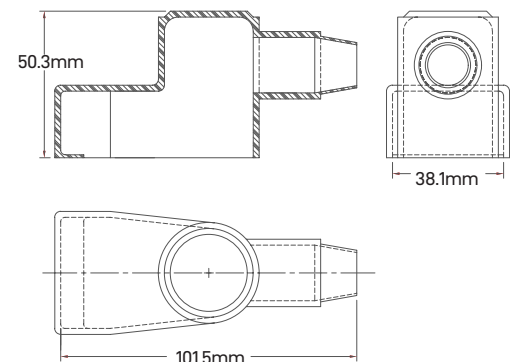

### PRODUCT INFORMATION

| Part No. | Description                  | Colour | Cable Size     |
|----------|------------------------------|--------|----------------|
| LV2490   | Insulator - wingnut terminal | Black  | 2 B&S          |
| LV2490R  | Insulator - wingnut terminal | Red    | 2 B&S          |
| LV2491   | Insulator - wingnut terminal | Black  | Up to 0000 B&S |
| LV2491R  | Insulator - wingnut terminal | Red    | Up to 0000 B&S |