

CONTINUOUS DUTY SOLENOIDS

SINGLE PACK



LV5700

12V 500A WINCH SOLENOID



- 500A 4KW Rating
- 4 Pole silver contacts
- Coil power dissipation: (single) $\leq 28.0W$
- Operating temperature: $-25^{\circ}C$ to $+55^{\circ}C$
- Applications: winch motors, hydraulic pump motors other reversible motors
- IP rating: IP52
- Dimensions: 130 x 100 x 68mm
- Weight: 960g




LV5701

24V 500A WINCH SOLENOID



- 500A 6KW Rating
- 4 Pole silver contacts
- Coil power dissipation: (single) $\leq 28.0W$
- Operating temperature: $-25^{\circ}C$ to $+55^{\circ}C$
- Applications: winch motors, hydraulic pump motors other reversible motors
- IP rating: IP52
- Dimensions: 130 x 100 x 68mm
- Weight: 960g

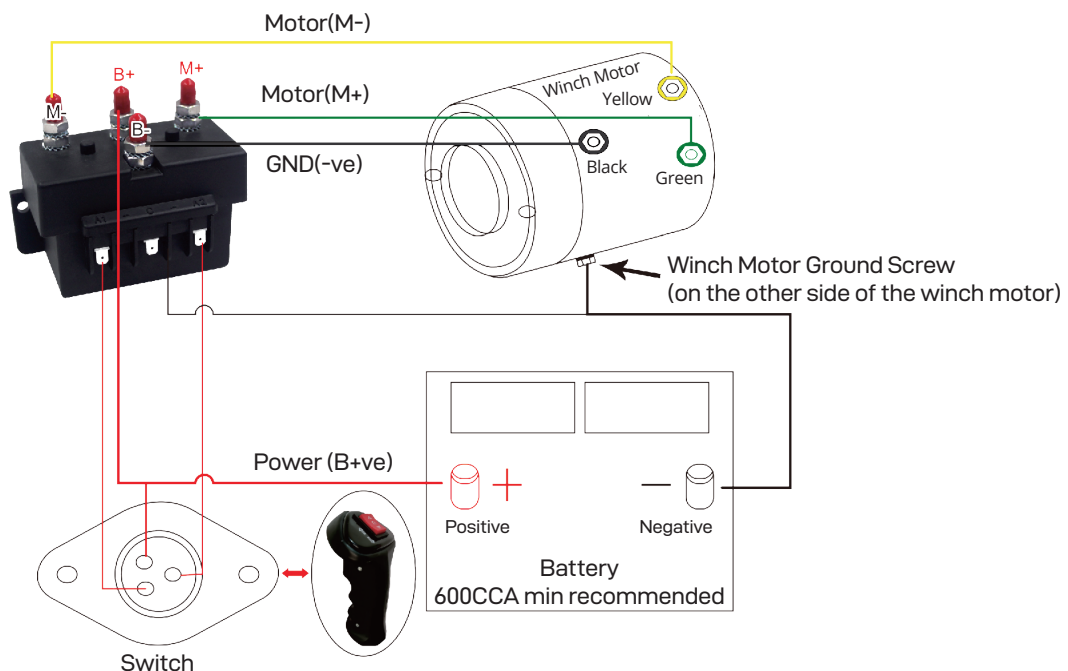

Note: Winch motor terminal positions may vary between models. Please ensure that you simply match the solenoid cables to the correct terminal colours as shown in the above diagram. Ensure all connections are tight.