


FEATURES

- Stop/Tail Indicator or Stop/Tail Indicator & Reverse functions
- Sequential Indicator
- Grey Glowtech tail light
- Integrated Retro Reflector
- Multi-volt 10-30V DC input & low current draw
- 100,000HR rated LED lifespan with solid state technology
- Simple surface mount design
- ADR approved for all functions
- Light weight tough polycarbonate housing & lens
- Mild tinted lens and gun metal grey chrome finish

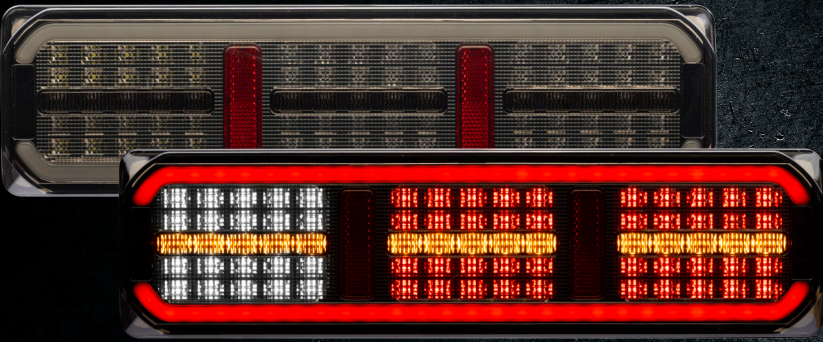

LED COMBINATION LAMPS

MULTI-VOLT
10-30 VDC

PC
POLYCARB
LENS

PC
POLYCARB
HOUSING

IP67
WATERPROOF

ADR
APPROVED

SEQUENTIAL
INDICATOR

GLOW TAIL
LIGHT

5YR
5 YEAR
WARRANTY

Elevate your vehicle's lighting with the ROADVISION BR390 Series, a premium solution blending Stop, Tail, Indicator, and Reverse functions with the cutting-edge sophistication of a sequential indicator and Grey Glowtech tail light. Built for safety, durability, and style, these advanced LED lamps provide outstanding brightness, an ultra-long lifespan of up to 100,000 hours, and the reliability of solid-state technology. The BR390 Series is fully ADR-approved for all functions and constructed with a robust yet lightweight polycarbonate housing and lens. Featuring a mild tinted lens and a gun metal grey chrome finish, these lamps exude a modern, sleek design. An integrated retro reflector enhances visibility, ensuring safety is never compromised. Versatile and easy to install, the BR390 Series delivers the perfect combination of functionality and aesthetics for any application requiring top-quality combination lamps.

PART NUMBERS

BR390ARR
LED Rear Combination Lamp 10-30V Stop/Tail/Ind/Ref
Glowtech Tail 390x105x39mm

PART NUMBERS

BR390ARW
LED Rear Combination Lamp 10-30V Stop/Tail/Ind/Rev/Ref
Glowtech Tail 390x105x39mm

SPECIFICATIONS	BR390ARR	BR390ARW
INPUT VOLTAGE	10-30 VDC	10-30 VDC
NUMBER OF LEDs	Indicator - 15 LEDs, Stop - 60 LEDs, Tail - 54 LEDs	Indicator - 15 LEDs, Stop - 40 LEDs, Tail - 54 LEDs, Reverse - 20 LEDs
CURRENT DRAW @ 13.8V	Ind - 0.57A, Stop - 0.29A, Tail - 0.18A @ 13.8V	Ind - 0.57A, Stop - 0.27A, Tail - 0.18A, Rev - 0.29A @ 13.8V
LENS CONSTRUCTION	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Polycarbonate	Polycarbonate
MOUNTING HOLE CENTRES	185-225mm	185-225mm
OVERALL DIMENSIONS	390 x 105 x 39mm	390 x 105 x 39mm
CABLE LENGTH	300mm Tinned Copper	300mm Tinned Copper
CTA APPROVAL	CTA-061760	CTA-061759
WIRING	Earth - White, Stop - Red, Tail - Brown, Indicator - Yellow	Earth - White, Stop - Red, Tail - Brown, Indicator - Yellow, Reverse - Black

LINE DIAGRAM

