


LV5403

6 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Output terminal: 6 x Push-on
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Dimensions: 85(L) x 70(W) x 36(H)mm




SINGLE PACK




LV5404

8 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Output terminal: 8 x Push-on
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Dimensions: 85(L) x 85(W) x 36(H)mm

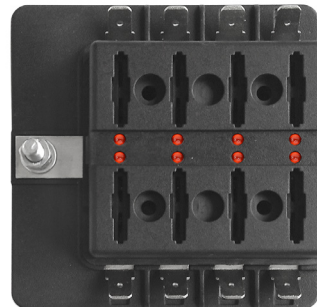


SINGLE PACK




LV5405

10 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Output terminal: 10 x Push-on
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Dimensions: 100(L) x 85(W) x 36(H)mm

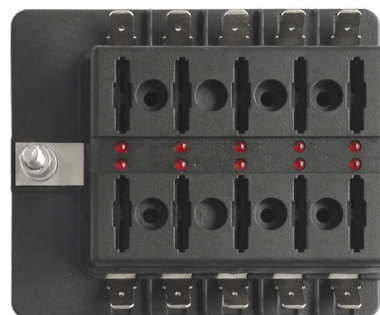


SINGLE PACK



LV5406

12 WAY ATS FUSE BLOCK WITH LED FAULT INDICATORS

- Voltage rating: 32Vdc max.
- Current rating: 30A/cct
- Input stud: M5
- Output terminal: 12 x Push-on
- Base material: PBT
- Cover material: PC
- Terminal material: Nickel plated copper
- Dimensions: 115(L) x 85(W) x 36(H)mm

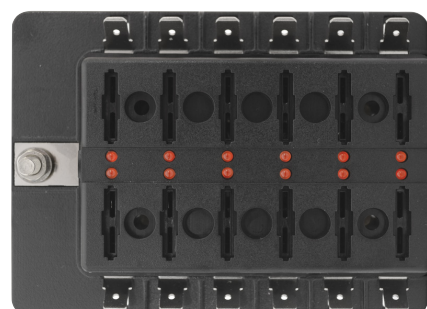

SINGLE PACK

