

S70 PRO SERIES

ROADVISION



FEATURES

- S70 Pro Stealth Series dual row LED bar lamps produce up to 14,337lm of instant light output
- Available in 13", 21" & 30" models
- Dynamic start-up dual colour DRL
- Smoked lens appearance and blackout mounting hardware
- 3W Osram LED's produce super white light close to daylight
- Multi-volt 10-30V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal management technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- IP68 & IP69K protection
- Adjustable side mounts & low-profile slide mounts
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED LIGHT BARS



THERMAL
MANAGEMENT
TECHNOLOGY



MULTI-VOLT
10-30 VDC



POLYCARB
LENS



COLOUR
TEMP



IP PROTECTION
IP68
IP69K



OVER/UNDER
VOLTAGE
PROTECTION



REVERSE
POLARITY
PROTECTION



DEUTSCH
CONNECTOR



OSRAM
LEDS



EMI
EMC
RADIO
INTERFERENCE
APPROVED



7 YEAR
WARRANTY

Engineered for those who demand nothing but the best, the ROADVISION S70 Pro Series combines sheer power with cutting-edge technology. Featuring dual-coloured dynamic start up Daytime Running Lights, the S70 Pro Series offers added safety and style with a customisable touch. Designed from the ground up for serious off-road enthusiasts and anyone chasing ultimate performance, the S70 Pro dual row light bars deliver the perfect blend of maximum light intensity and unrivalled beam penetration. Pumping out up to 14,337 lumens and reaching a mind-blowing 863m @ 1 lux from a single 30" bar, the S70 Pro utilises ROADVISION's Thermal Management System and Projector Beam Technology to keep performance at its peak—even in the most punishing conditions.

PART NUMBERS



RBL7013SCD

LED Bar Light S70 Stealth Pro SERIES 13" 10-30V Combo




RBL7021SCD

LED Bar Light S70 Stealth Pro SERIES 21" 10-30V Combo



RBL7030SCD


LED Bar Light S70 Stealth Pro SERIES 30" 10-30V Combo

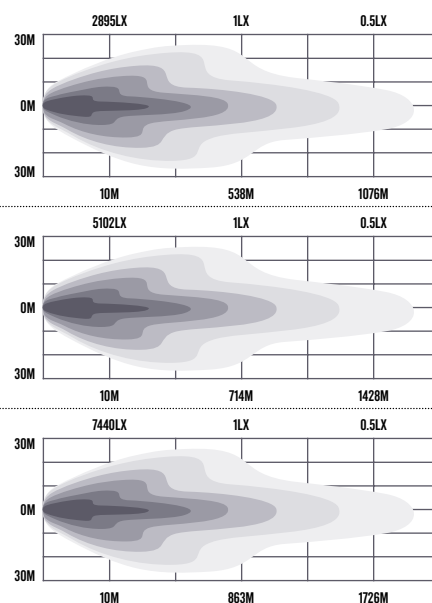

S70

STEALTH
PRO
S E R I E S

DYNAMIC DRL
AMBER OR WHITE

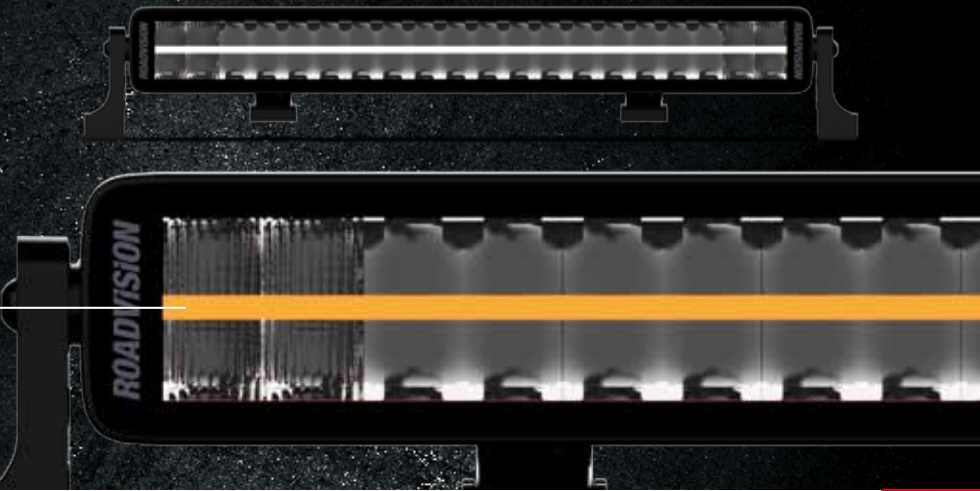

SPECIFICATIONS	RBL7013SCD	RBL7021SCD	RBL7030SCD
BEAM PATTERN	Projector Combo 8 Driving / 16 Spot	Projector Combo 8 Driving / 32 Spot	Projector Combo 16 Driving / 44 Spot
MAXIMUM LUMENS	6545lm	10129lm	14337lm
MAXIMUM LUX @ 10M	2895lx	5102lx	7440lx
BEAM DISTANCE @1LX	538m	714m	863m
INPUT VOLTAGE	10-30 VDC	10-30 VDC	10-30 VDC
MAXIMUM WATTS	95W	165W	240W
NUMBER OF LEDS	24 x 3W Osram	40 x 3W Osram	60 x 3W Osram
CURRENT DRAW @ 13.8V	6.9 Amps	12 Amps	17.4 Amps
LENS CONSTRUCTION	Polycarbonate	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Aluminium	Aluminium	Aluminium
WIRING	4 PIN Deutsch Plug	4 PIN ATP Plug	4 PIN ATP Plug
DIMENSIONS AXBXC	357 x 67 x 70mm	561 x 67 x 70mm	815 x 67 x 70mm

LINE DIAGRAM

