


LV9132

60W LED CURVED WORK LIGHT

- Die-cast aluminium housing
- Polycarbonate lens
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -50°C to +80°C
- Current draw: 4.2A @ 12V DC



DIMENSIONS:




LV9133

90W LED CURVED WORK LIGHT

- Die-cast aluminium housing
- Polycarbonate lens
- Stainless steel mounting hardware
- Built in DT connector
- Operating temperature: -50°C to +80°C
- Current draw: 6.2A @ 12V DC



DIMENSIONS:




LV9136

48W LED RECTANGLE WORK LIGHT

- Die-cast aluminium housing
- Polycarbonate lens
- 60° wide beam pattern
- Stainless steel mounting hardware
- Silicone cable w/ DT connector
- Colour temp: 6000°K
- Operating temperature: -40°C to +60°C
- Current draw: 3A @ 12V DC



DIMENSIONS:

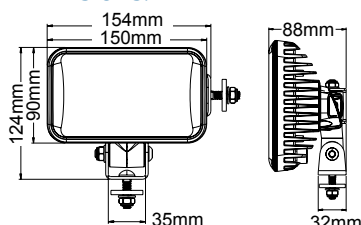

ALL NEW

DUAL MOUNTING
OPTIONS



Dual
Mounting
Options