




1.5MM² SINGLE CORE MARINE CABLE

ROLL

- Conductor: Tinned copper wire (TCW) to AS/NZS 1125
- Insulation: RoHS Compliant V90HT (105) P.V.C. to AS/NZS 3808
- Voltage: 0.6/1KV
- Applications: Marine, wiring of communication, electronic equipment & switchboards
- Conductor: 30 Strands x Ø0.25mm
- Nominal area: 1.5mm²
- Current rating: 21A@30°C
- Insulation thickness: 0.8mm
- Resistance@20°C: 13.70hm/km
- Nominal O.D: 3.15mm
- Mass: 2.2Kg/100m


PRODUCT INFORMATION

Part No.	Colour	Length(m)
CB015I1-100BE	Blue	100
CB015I1-100BK	Black	100
CB015I1-100BN	Brown	100
CB015I1-100GY	Grey	100
CB015I1-100PK	Pink	100
CB015I1-100RD	Red	100
CB015I1-100VT	Violet	100
CB015I1-100WE	White	100
CB015I1-100YW	Yellow	100

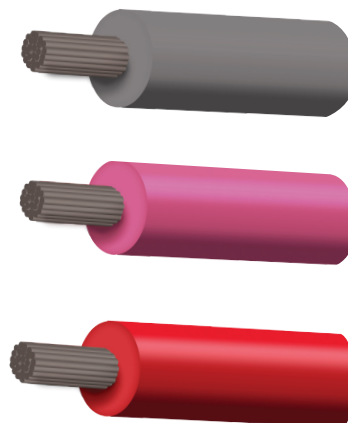

4MM SINGLE CORE MARINE CABLE

- Conductor: Tinned copper wire (TCW) to AS/NZS 1125
- Insulation: RoHS Compliant V90HT (105) P.V.C. to AS/NZS 3808
- Voltage: 250/440V
- Applications: Pleasure craft, general purpose marine wiring
- Conductor: 23 Strands x Ø0.32mm
- Nominal area: 1.84mm²
- Current rating: 28A@30°C
- Insulation thickness: 0.4mm
- Resistance@20°C: 10.20hm/km
- Nominal O.D: 2.6mm
- Mass: 2.1Kg/100m

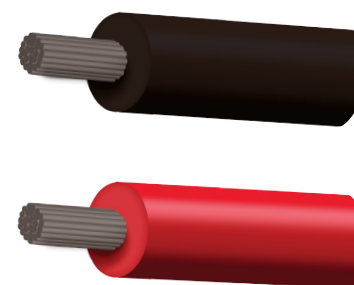

PRODUCT INFORMATION

Part No.	Colour	Length(m)
CB004M1-030BK	Black	30
CB004M1-050BK	Black	50
CB004M1-030RD	Red	30
CB004M1-050RD	Red	50