


Product Release

**48W
LED RECTANGLE WORK LIGHT**




**DUAL MOUNTING
OPTIONS**




Features:

- Voltage range: 9-36V
- 48W, 32 x 1.5W LEDs (Lumileds)
- Die-cast aluminium housing
- Polycarbonate lens
- 60° wide beam pattern
- Stainless steel mounting hardware
- Dual mounting
- Silicone cable with DT connector
- Lumens: 4500 raw, 3800 effective
- Colour temp: 6000K
- Operating temperature: -40°C to +60°C
- Current draw: 3A@ 12V DC
- IP69K rated, CISPR25-CLASS 5
- Approved by /CE/RoHS/R10

Beam Pattern:

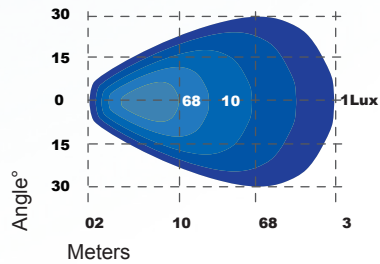

Dimensions:

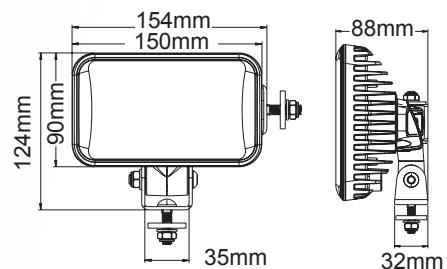

PRODUCT INFORMATION

Part No.	Description	Barcode
LV9136	60° Wide Flood Beam	9342828224123