

ZETA20D

20" 72W LED LIGHT BAR DOUBLE ROW


- 40 x 1.5 Osram® LEDs
- Combination beam pattern
- Colour temperature: 6000K
- 1 Lux: 359 metres
- Polycarbonate lens
- Die-cast aluminium housing
- Sealed DT connector
- Lumens: 6837 raw, 4558 effective
- Current draw: 2.8/6.0A
- Measurements: 565 x 85 x 57.5mm (inc. bracket)
- * Optional wiring loom available ZETA01 see page 186




ZETA



DIMENSIONS:

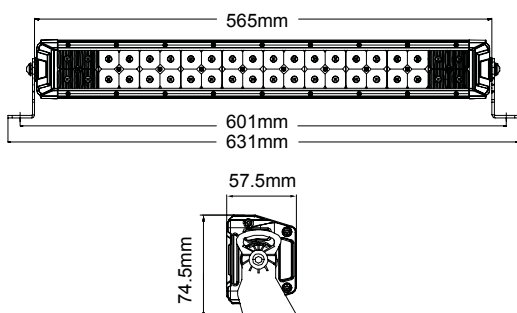

BEAM PATTERN:

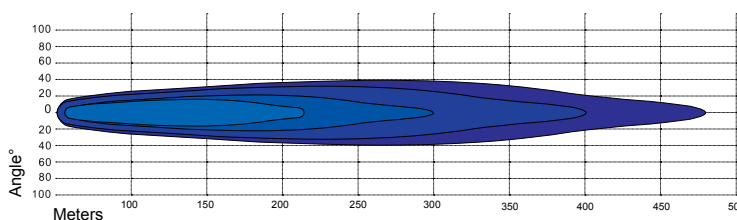

LV9123A

20" 150W DOUBLE ROW LED LIGHT BAR WITH FLASHING AMBER WARNING LIGHTS


- 150W, 12 x 5W spot, 18 x 5W flood white, LP LEDs (Driving Light)
- 24W, 8 x 3W amber LP LEDs (Warning Light) **Class 1 SAE/J595**
- Free form reflector design
- One piece polycarbonate lens
- Extruded aluminium housing
- Powder coated finish
- Sealed DT connector
- Electronic thermal management
- Approved by ECE R10/R112 (ref. 30)
- Colour temp: 6000°K
- Lumens: 14000 raw, 11500 effective
- 1 Lux @ 460 metres
- Current draw: 10.2A @ 12V DC (Driving Light)
2.1A @ 12V DC (Warning Light)



TITAN
SERIES



Flashing amber
warning lights
on each end
Class 1 SAE/J595




Double row
LED combination
light bar



ALL NEW

DIMENSIONS:

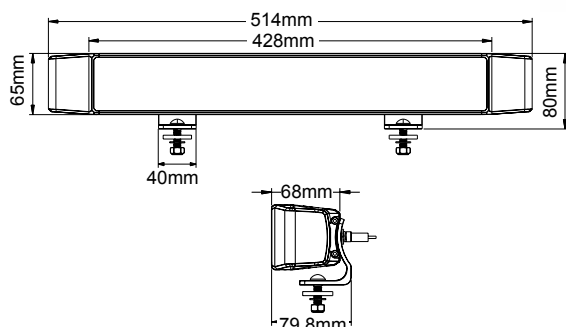

BEAM PATTERN:

