

LV9119

31" 160W LED CURVED LIGHT BAR & PARK LIGHT

- 16 x 10W LEDs (driving light), 8 x 1W LED (park light)
- Driving beam pattern
- Free form reflector design
- One piece polycarbonate lens
- Die cast aluminium housing
- Powder coated finish
- Sealed DT connector
- Electronic thermal management
- Dual mounting options
- Approved by ECE R112/R7/R10 (ref. 45)
- Colour temp: 6500°K
- Lumens: 15200 raw, 12920 effective
- Current draw @ 12V DC: driving beam: 10.2A, park beam: 0.4A



Dual Mounting Options




Vertical LED Park Light

TITAN
SERIES




DIMENSIONS:

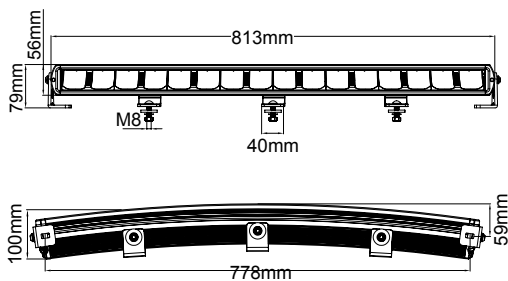

PREMIUM QUALITY

BEAM PATTERN:

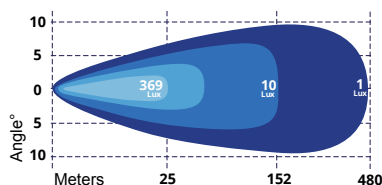

LV9404C

33" 180W LED LIGHT BAR

- 18 x 10W LEDs
- Combination 40°+10°+40° beam pattern
- Stainless steel mounting brackets w/ bottom rail mount
- Die cast aluminium housing
- Black powder coated finish
- Polycarbonate lens
- 200mm cable w/ DT connector
- RFI/EMC protection
- Operating temperature: -40°C to +60°C
- Current draw: 11.1A @ 12V DC



Bottom Rail Mount




Side View


TITAN
SERIES



DIMENSIONS:

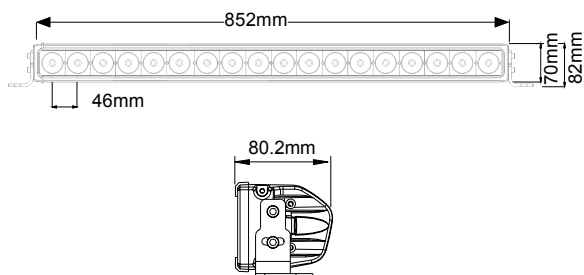

BEAM PATTERN:

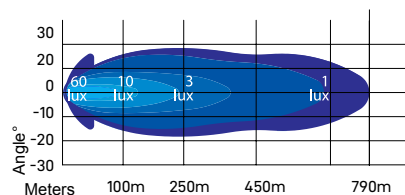

PRODUCT INFORMATION

LV9404S

10° Spot beam pattern