

FEATURES

- DRE2 Series dual row LED bar lights produce up to 22157lm of instant light output
- Available in 12", 22" & 32" models
- 5W Osram LED's produce super white light close to daylight
- Multi-volt 11-32V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal management technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP68 rated
- Simple 2 wire installation with Deutsch plug
- Low profile slide & end mounts
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved

LED LIGHT BARS

THERMAL
MANAGEMENT
TECHNOLOGYMULTI-VOLT
11-32 VDCPOLYCARB
LENSCOLOUR
TEMP

WATERPROOF

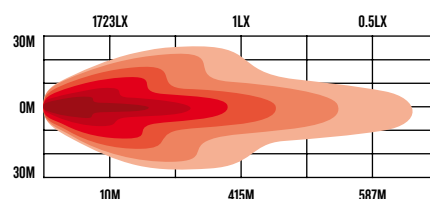
OVER/UNDER
VOLTAGE
PROTECTIONREVERSE
POLARITY
PROTECTIONDEUTSCH
CONNECTOROSRAM
LEDsEMI/EMC
RADIO
INTERFERENCE
APPROVED3 YEAR
WARRANTY

The Roadvision Essentials DRE2 Series LED bar lights are the ideal choice for those chasing value for money without compromising on quality. Utilising high performing 5W Osram LED's, Thermal Management Technology, packaged in an IP68 rated housing and shielded behind a polycarbonate lens, these bar lights are built to endure the toughest conditions. The Essentials Series dual row LED bar lights produce up to 22157lm of instant light output. With the perfect combination of spot and driving optics, they produce combination style beam patterns reaching up to 797 meters @ 1 LUX. Available in the most common 12", 22" & 32" lengths, they are a perfect entry level solution while still providing great output, durability and the perfect look for your rig.

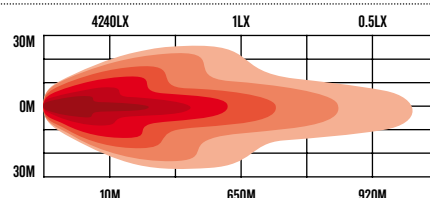
PART NUMBERS



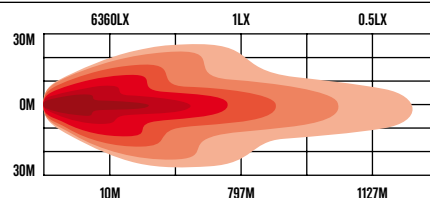
RBL4121C

12" LED Bar Light 11-32V 70W
Combination Beam

RBL4221C

22" LED Bar Light 11-32V 140W
Combination Beam

RBL4321C

32" LED Bar Light 11-32V 209W
Combination Beam



| SPECIFICATIONS | RBL4121C | RBL4221C | RBL4321C |
|-----------------------------|--------------------|--------------------|--------------------|
| BEAM PATTERN | Combination | Combination | Combination |
| MAXIMUM LUMENS | 7695lm | 14620lm | 22157lm |
| MAXIMUM LUX @ 10M | 1723lx | 4240lx | 6360lx |
| MAXIMUM BEAM DISTANCE @ 1LX | 415m | 650m | 797m |
| INPUT VOLTAGE | 11-32VDC | 11-32VDC | 11-32VDC |
| MAXIMUM WATTS | 70W | 140W | 209W |
| NUMBER OF LEDS | 20 x 5W Osram | 40 x 5W Osram | 60 x 5W Osram |
| CURRENT DRAW @ 13.8V | 4.86 Amps | 9.72 Amps | 14.54 Amps |
| LENS CONSTRUCTION | Polycarbonate | Polycarbonate | Polycarbonate |
| HOUSING CONSTRUCTION | Die-Cast Aluminium | Die-Cast Aluminium | Die-Cast Aluminium |
| WIRING | 2 Pin Deutsch Plug | 2 Pin Deutsch Plug | 2 Pin Deutsch Plug |
| DIMENSIONS AXBXC | 357 x 80 x 61mm | 612 x 80 x 61mm | 867 x 80 x 61mm |

LINE DIAGRAMS

