


LV9125

14" 120W DOUBLE ROW LED LIGHT BAR

- 24 x 5W LEDs
- Free form reflector design
- One piece polycarbonate lens
- Die cast aluminium housing
- Powder coated finish
- Sealed DT connector
- Electronic thermal management
- Dual mounting options
- Approved by ECE R10/R112 (ref. 30)
- Colour temp: 6000°K
- Lumens: 10900 raw, 9200 effective
- Current draw: 6.9A @12V DC



Dual Mounting Options




Double Row


TITAN
SERIES



DIMENSIONS:

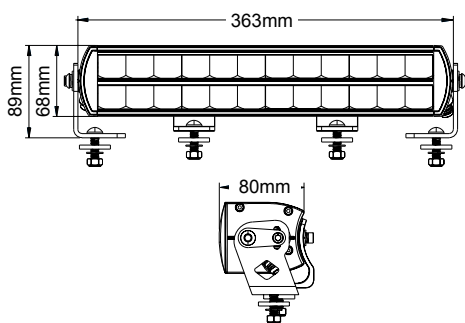

BEAM PATTERN:



LV9401C

17" 90W LED LIGHT BAR

- 9 x 10W LEDs
- Combination 40°+10°+40° beam pattern
- Stainless steel mounting brackets w/ bottom rail mount
- Die cast aluminium housing
- Black powder coated finish
- Polycarbonate lens
- 200mm cable w/ DT connector
- RFI/EMC protection
- Operating temperature: -40°C to +60°C
- Current draw: 5.5A @ 12V DC



Bottom Rail Mount




Side View


TITAN
SERIES



DIMENSIONS:

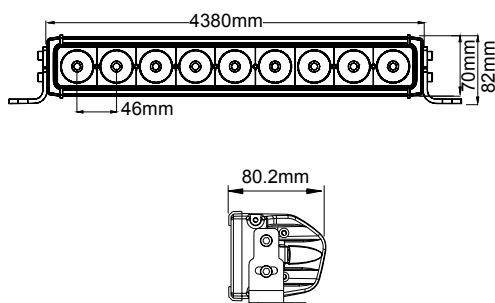

BEAM PATTERN:

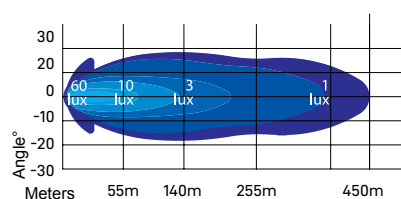

PRODUCT INFORMATION

LV9401S

10° Spot beam pattern