

S9LK PRO SERIES

ROADVISION



FEATURES

- S9LK Stealth PRO Series 9" Driving Light
- Dynamic start-up DRL
- Includes Black cover with DRL windows
- Blackout mounting hardware
- 3W Osram LED's produce super white light close to daylight
- Multi-volt 10-30V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal Management Technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- IP68 & IP69K protection
- Over/under voltage, reverse polarity protection
- EMI/EMC radio interference approved

LOW KELVIN 4000K



THERMAL
MANAGEMENT
TECHNOLOGY



HALO DRL
RING



MULTI-VOLT
10-30 VDC



POLYCARB
LENS



COLOUR
TEMP



IP PROTECTION
IP68 IP69K



OVER/UNDER
VOLTAGE
PROTECTION



REVERSE
POLARITY
PROTECTION



DEUTSCH
CONNECTOR



OSRAM
LED'S



EMI EMC
RADIO
INTERFERENCE
APPROVED



7YR
7 YEAR
WARRANTY


Roadvision's S9LK Stealth PRO Series Driving Lights deliver cutting-edge upgrades and a sleek modern appearance, making them the perfect choice for larger 4WDs and trucks. Maintaining the contemporary bezel-less design, the S9LK series now features dynamic start-up Daytime Running Lights (DRL) and a stylish black cover with a dedicated DRL window, offering enhanced functionality and aesthetics. When not illuminated, the DRL seamlessly darkens, ensuring a sleek, understated look. Roadvision's S9LK Stealth PRO Series Driving Lights further enhance performance with a warmer light colour and wider beam pattern, delivering better visibility in wet and dusty conditions while dramatically reducing road sign flare. With black mounting hardware, the S9LK series utilizes 34 x 3W Osram LEDs to produce an impressive 9594lm per light and 493mts of beam penetration at 1 lux. Built to withstand the harshest conditions, these lights feature a lightweight yet tough aluminium housing and a durable polycarbonate lens. Powered by Roadvision's Thermal Management Technology, the S9LK series guarantees superior performance and durability in any environment.

PART NUMBERS



RDL6901LKD

9" LED Driving Light 10-30V Round 160W Combination Beam

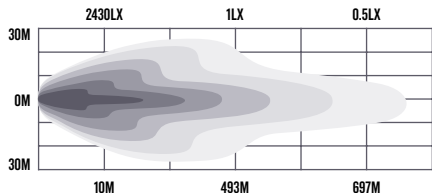

SPECIFICATIONS

RDL6901LKD

BEAM PATTERN	Combination
MAXIMUM LUMENS PER LIGHT (PAIR)	9,594lm (19,188lm)
MAXIMUM LUX @ 10M PER LIGHT (PAIR)	2,430lx (4,860lx)
MAXIMUM BEAM DISTANCE @ 1LX PER LIGHT (PAIR)	493m (697m)
INPUT VOLTAGE	10-30VDC
MAXIMUM WATTS	160W
NUMBER OF LEDS	34 x 3W Osram
CURRENT DRAW @ 13.8V	11.64 Amps
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium
WIRING	2 Pin Deutsch Plug
DIMENSIONS AXBXC	238 x 87 x 249mm

LINE DIAGRAM

