


OPTIRAY®-E

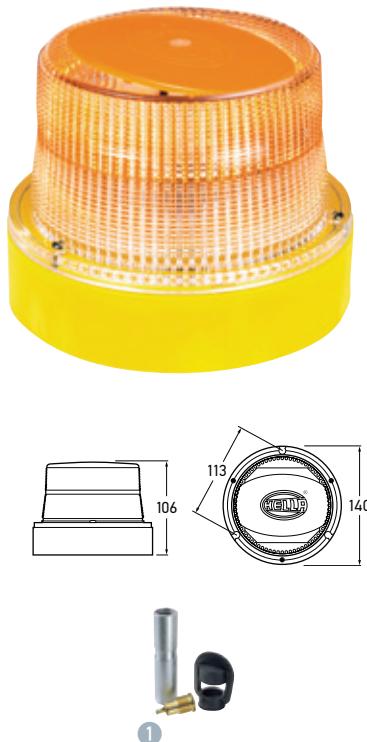

HM300ADIR	Amber Illuminated - Direct Mount
HM300AFLX	Amber Illuminated - Flexible Mount
HM300AMAG	Amber Illuminated - Magnetic Mount
HM300RDIR	Red Illuminated - Direct Mount
HM300RMAG	Red Illuminated - Magnetic Mount
HM300BDIR	Blue Illuminated - Direct Mount
HM300BMAG	Blue Illuminated - Magnetic Mount
HM300GDIR	Green Illuminated - Direct Mount
HM300GMAG	Green Illuminated - Magnetic Mount
HM300WDIR	White Illuminated - Direct Mount
HM300WMAG	White Illuminated - Magnetic Mount

Compact and extremely robust LED Warning Beacon for heavy-duty applications. Equipped with high-impact resistant, clear polycarbonate lens and UV-resistant fibreglass-nylon-composite base for increased mechanical strength. Tolerant to severe vibration levels and suitable for corrosive environments where metal products should not be used. O-ring sealed against dust and water ingress.

Voltage	Multivolt™ (12-30V DC)	
Wattage	12W Max.	
Flash Rate	80 per minute (double)	
Temp. Range	-20° to +50°C	
Mounting	Fixed or magnetic mounting on horizontal surfaces. Optional pipe mount kit available.	
Lead Length	2 metres (double-insulated cable).	
Protection	Overheat, reverse polarity and short circuit protected. Fully sealed against dust and moisture to IP6K5. Shock resistant to 200G.	
Note	Meets SAE J845 requirements for Class 1 (red) and Class 2 (amber)	
Accessories	HM360PIPE 9.HM300FLX	Pipe Mount Kit ① FlexiMount Adapter
Spare Parts	9.HM360LENS	Clear PC Lens