




SINGLE CORE FLEXIBLE POWER & WELDING CABLE

ROLL

- Conductor: Flexible Class 6 Bunched OXYGEN FREE Plain Copper Wire to AS/NZS 1125
- Insulation: RoHS Compliant Nitrile (NBR) Modified P.V.C. type V90HT to AS/NZS 3808
- Insulation Colour: White
- Voltage: 0.6/1.0kV
- Applications: Power, welding & general purpose automotive wiring
- Sheath: RoHS Compliant Nitrile (NBR) Modified P.V.C. type V90HT to AS/NZS 3808
- Insulation thickness: 0.6mm

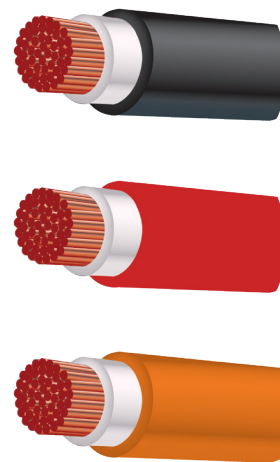

PRODUCT INFORMATION

| Part No. | Size (B&S) | Area (mm ²) | Amp@30°C | Colour | Length (m) | Strands/Dia. | Resistance (Ohm/km) | O.D (mm) | Mass (kg/100m) |
|---------------|------------|-------------------------|----------|--------|------------|--------------|---------------------|----------|----------------|
| CB016W1-100OE | 6 | 16 | 91 | Orange | 100 | 511/0.2 | 1.21 | 10.1 | 20.16 |
| CB025W1-100OE | 3 | 25 | 121 | Orange | 100 | 784/0.2 | 0.78 | 11.8 | 29.14 |
| CB035W1-010BK | 2 | 35 | 150 | Black | 10 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB035W1-050BK | 2 | 35 | 150 | Black | 50 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB035W1-100BK | 2 | 35 | 150 | Black | 100 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB035W1-050OE | 2 | 35 | 150 | Orange | 50 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB035W1-100OE | 2 | 35 | 150 | Orange | 100 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB035W1-100RD | 2 | 35 | 150 | Red | 100 | 1120/0.2 | 0.554 | 13.1 | 38.96 |
| CB050W1-100RD | 0 | 50 | 189 | Red | 100 | 1568/0.2 | 0.386 | 14.9 | 52.84 |
| CB050W1-100BK | 0 | 50 | 189 | Black | 100 | 1568/0.2 | 0.386 | 14.9 | 52.84 |
| CB050W1-010OE | 0 | 50 | 189 | Orange | 10 | 1568/0.2 | 0.386 | 14.9 | 52.84 |
| CB050W1-050OE | 0 | 50 | 189 | Orange | 50 | 1568/0.2 | 0.386 | 14.9 | 52.84 |
| CB070W1-010BK | 2/0 | 70 | 238 | Black | 10 | 2240/0.2 | 0.272 | 17 | 72.34 |
| CB070W1-050OE | 2/0 | 70 | 238 | Orange | 50 | 2240/0.2 | 0.272 | 17 | 72.34 |
| CB095W1-050OE | 3/0 | 95 | 287 | Orange | 50 | 3040/0.2 | 0.206 | 19.3 | 96.18 |
| CB120W1-050OE | 4/0 | 120 | 341 | Orange | 50 | 3040/0.2 | 0.161 | 20.8 | 117.86 |