



Toyota Land Cruiser 200 Series Direction-Plus™ ProVent® 200 Installation Guide

This document is to be used as a guide for the installation of the Direction Plus Land Cruiser 200 Series ProVent® 200 Crankcase Ventilation Kit to a 2008+ Toyota Land Cruiser 200 Series V8 Diesel. It is recommended that the installation of the product be carried out by a competent qualified mechanic.


Important Before Starting

- Ensure you have the correct tools to complete the fitment
- Read the instructions in full and familiarize yourself with the installation, before commencing any work

Included in the kit

- 1 x Mann + Hummel ProVent® 200
- 1 x Mounting Bracket
- 2 x 1400mm of 16mm Hose
- 3 x 16mm 90° Joiners
- 6 x 25mm Clamps
- 2 x 32mm Clamps
- 2 x 16mm to 25mm Hose Coupler
- 8 x Cable Ties
- 1 x M6x12 Bolt
- 1 x M6 Flat Washer
- 1 x 16mm to 19mm 90° Joiner
- 2 x M8x25 Bolts
- 2 x M8 Flat Washers
- 1 x 1000mm of 12mm Hose
- 1 x Drain Tap Assembly
- 2 x 12-20mm Hose Clamps

Approximate mounting location

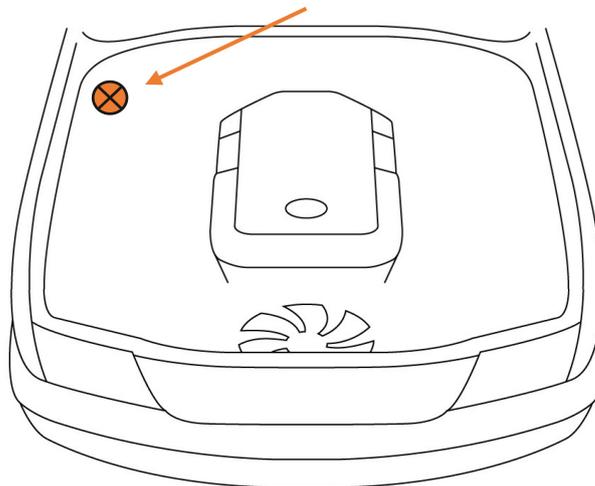

*Kit contents are subject to change based on component availability and/or refinement


Installation Guide

1. Begin by removing the engine cover to give access to the crankcase bypass hose in the front passenger corner.




Land Cruiser 200 Series Engine Bay – Overall View

2. Begin by locating the factory bypass hose which runs from the black box in the front of the intercooler on the passenger side of the vehicle to the intake pipe in front of it. The hose is only about 100mm in length and shaped like an "L". Once located, this hose needs to be disconnected from the black box and rotated 180°. A 16mm 90° Joiner needs to be inserted into the end facing down, secure in place with a spring clamp. (Please note there is an additional 19-16mm reducing elbow in the kit. If your vehicle is older your factory hose may not clamp down to the original size, the reducing elbow can be used here instead).

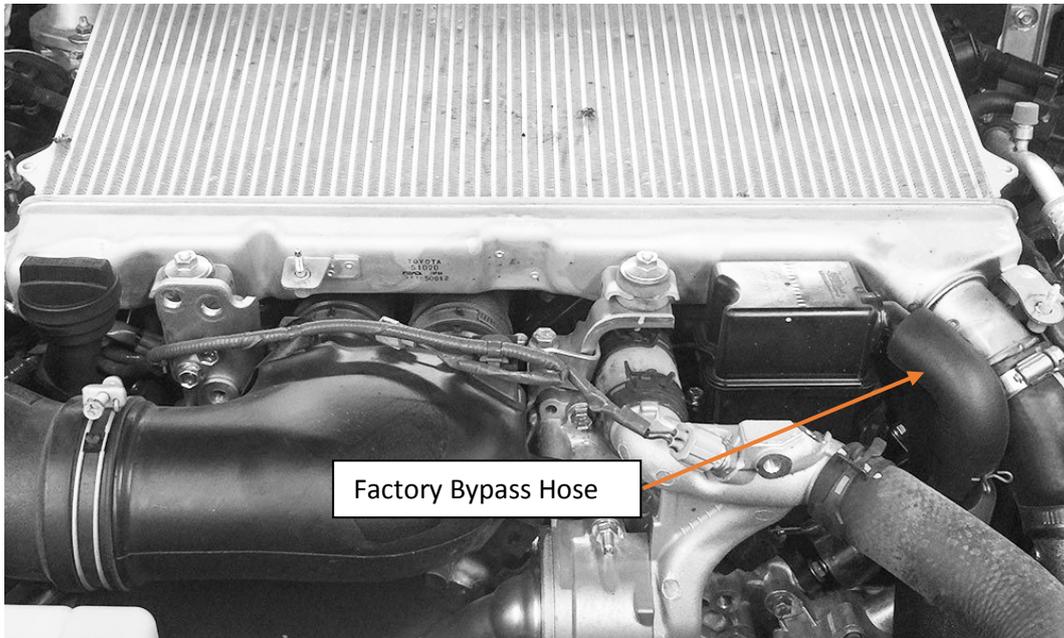


3. Locate the horn behind the airbox bolted to the side of the engine bay. Unbolt it and unplug from the wiring harness. Once removed, disassemble the bracket and horn, the bracket is not reused. Bolt the horn to the new bracket supplied in the kit. It uses the 6mm hole halfway up. Please note the horn is flipped 180°, make sure it's aligned to be able to plug back in to the wiring. Once aligned correctly, tighten horn mounting bolt in place.

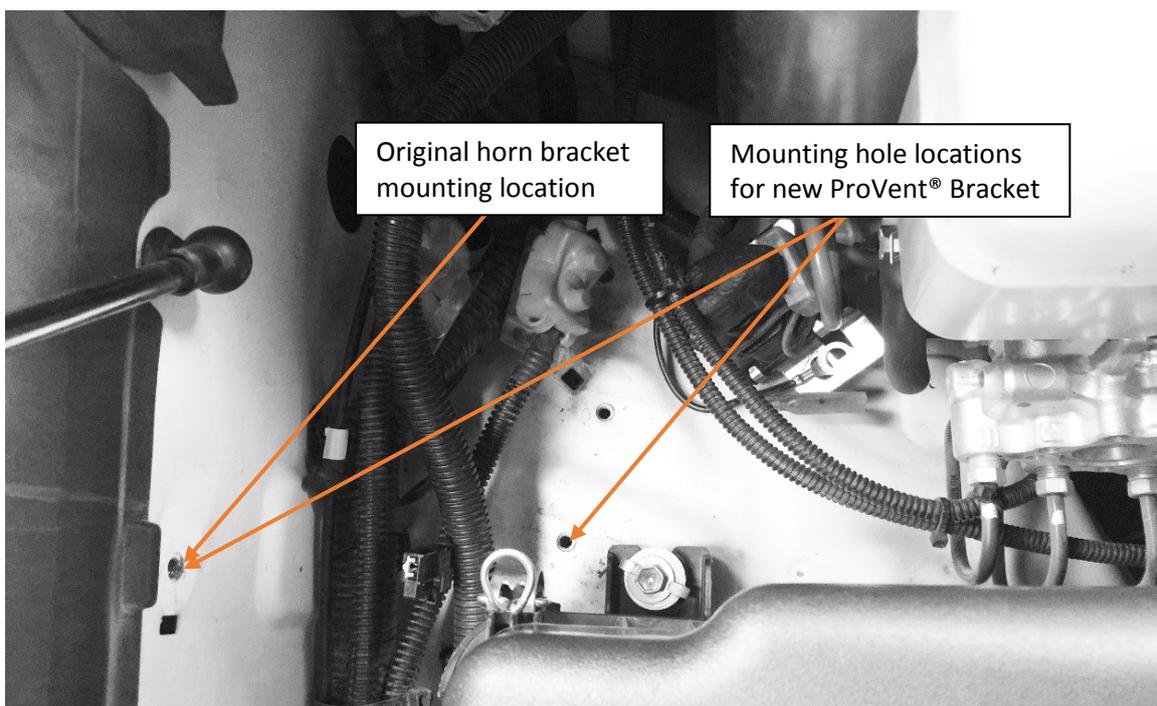




Horn and bracket removed from vehicle horn is remounted to new bracket, original bracket is not reused

4. Using the original M6 bolt from the horn bracket and the new M6 Bolt spring washer and flat washer supplied in the kit, secure the mounting bracket in place behind the airbox. It uses two unused factory threaded holes to locate and mount from. Once in place, plug the horn back in.

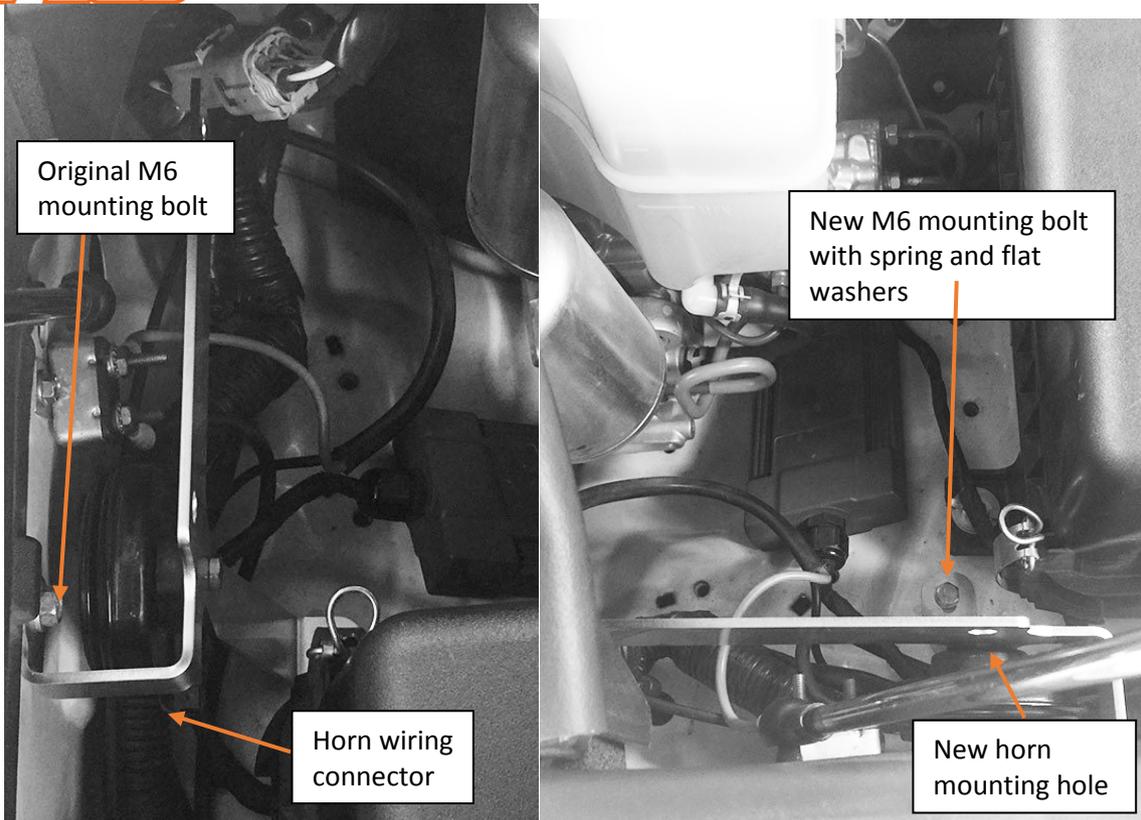


Front view left, top down view right: Land Cruiser 200 Series Engine Bay- Drivers Side

5. Connect the 12mm (1/2") Hose to the underside of the catch can body, using a 12-20mm Clamp to secure it in place.

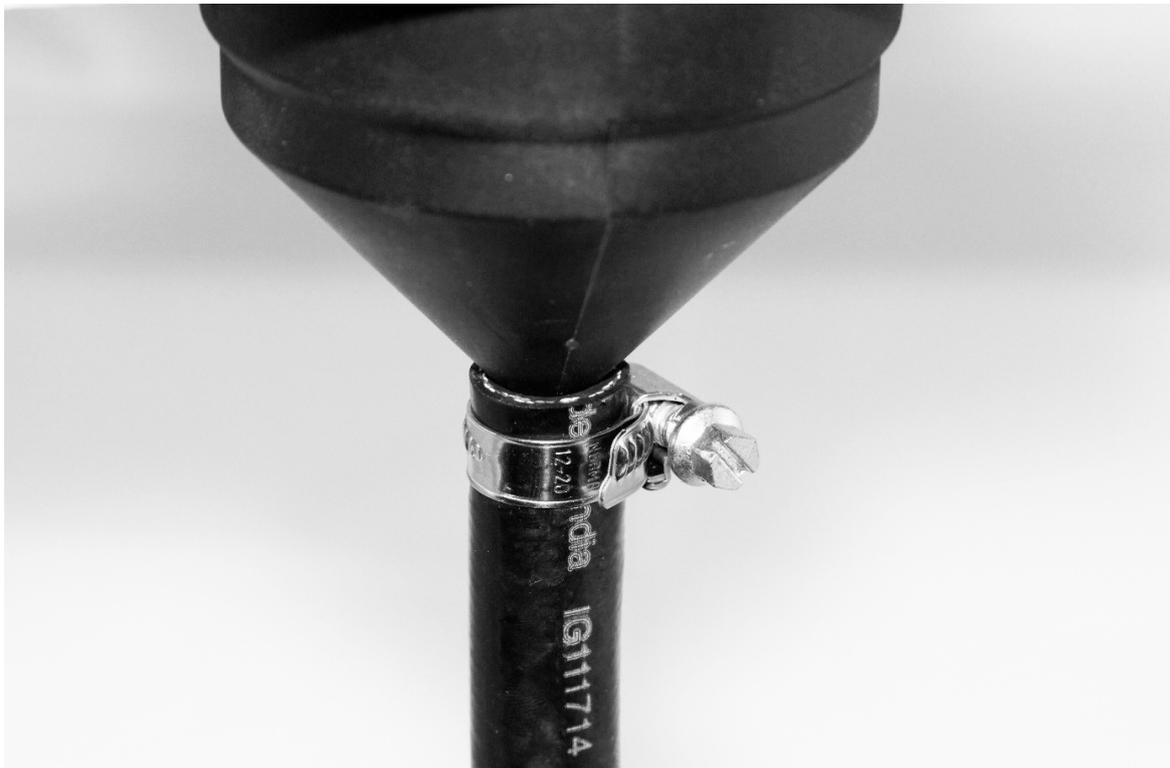

Provent® 200 with 12mm hose connected and secured with 12-20mm worm drive clamp

6. With a flat washer on each of the M8x25mm bolts, mount the ProVent® 200 to the mounting bracket. Use a flat washer, spring washer and nut to secure the bolts on the other side.

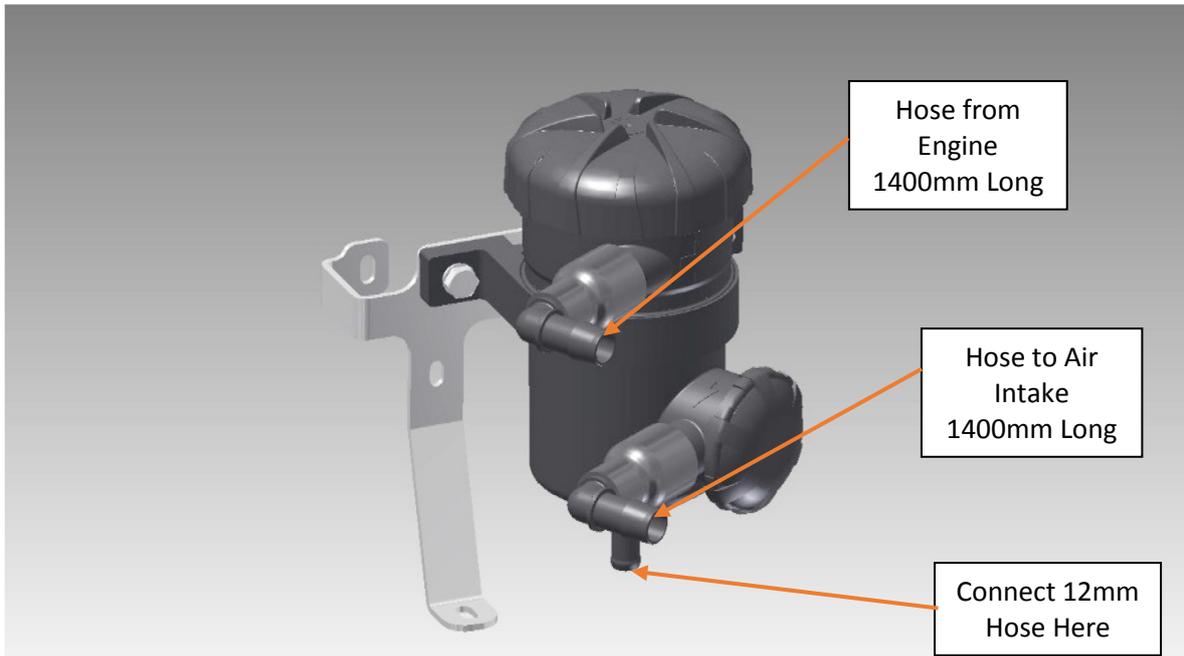

Pre-assembled Provent® 200 with bracket – Please note ProVent® rotation in this image is correct, your ProVent® should come at the correct rotation in the box – if it is not, refer to the image on the last page of this installation guide.

7. Feed the 12mm Hose down the side of the engine bay, under the vehicle to an out of the way location, making sure it is clear of any suspension, driveline and exhaust components, fit the Tap hose tail into the hose.



Hose tail and tap assembly inserted into 12mm hose, hose clamp not required


8. Use the supplied cable ties to secure the 12mm hose into the location required under the vehicle to prevent movement. Note: Leave a slight amount of slack in the line where the body and chassis join to prevent stretching the hose.
9. Make sure the tap position is closed and avoid placing the tap in a location in which it will fill with dirt and mud.



Left image – Tap Open.

Right image – Tap Closed.

10. Mount one end of the first 1400mm long 16mm (5/8") hose to the lower 16mm (5/8") 90° joiner fitting on the ProVent® 200. Secure in place with a hose clamp.
11. Mount the other end of the same 1400mm long 16mm (5/8") hose to the 16mm (5/8") 90° joiner fitting you put on the factory bypass hose earlier. Secure in place with a hose clamp.

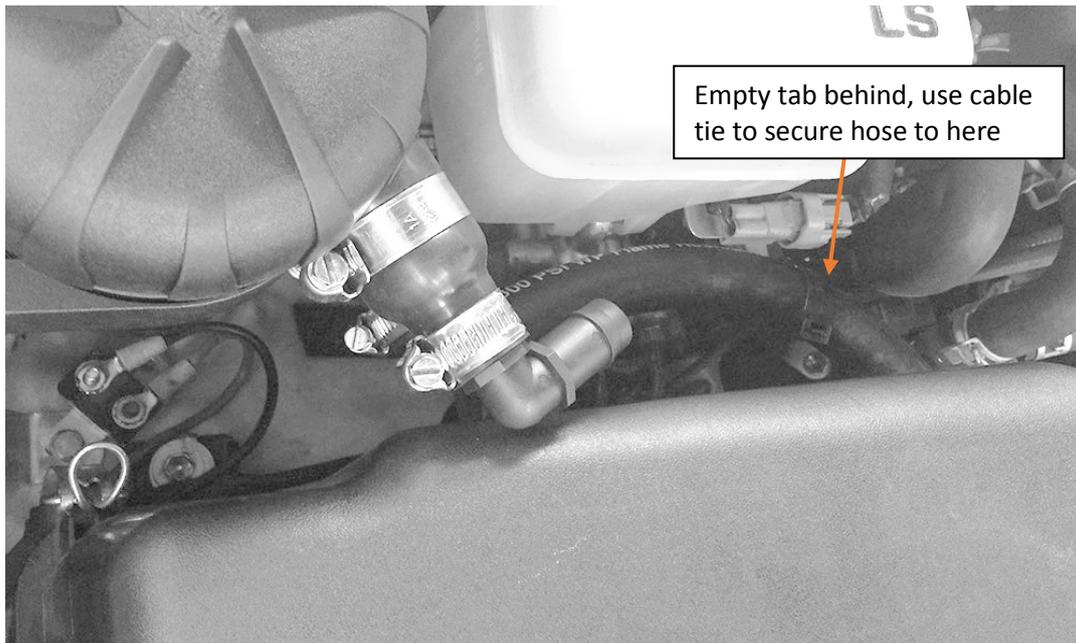


Lower hose connected to outlet port on the ProVent® 200. Note there is an empty tab to cable tie the hose to and keep it secure. Please note earlier version of kit with older style clamps.

12. Mount one end of the second 1400mm 16mm (5/8") hose to the upper 16mm (5/8") 90° joiner fitting on the ProVent® 200. Secure in place with a hose clamp.
13. Mount the other end of the 1400mm 16mm (5/8") hose to the black box in front of the intercooler on the front passenger side. Secure in place with the factory ring clamp.



16mm (5/8") Supply hose to top port on ProVent® 200, from black box in front of intercooler

16mm (5/8") Return hose to air intake, from lower port on ProVent® 200

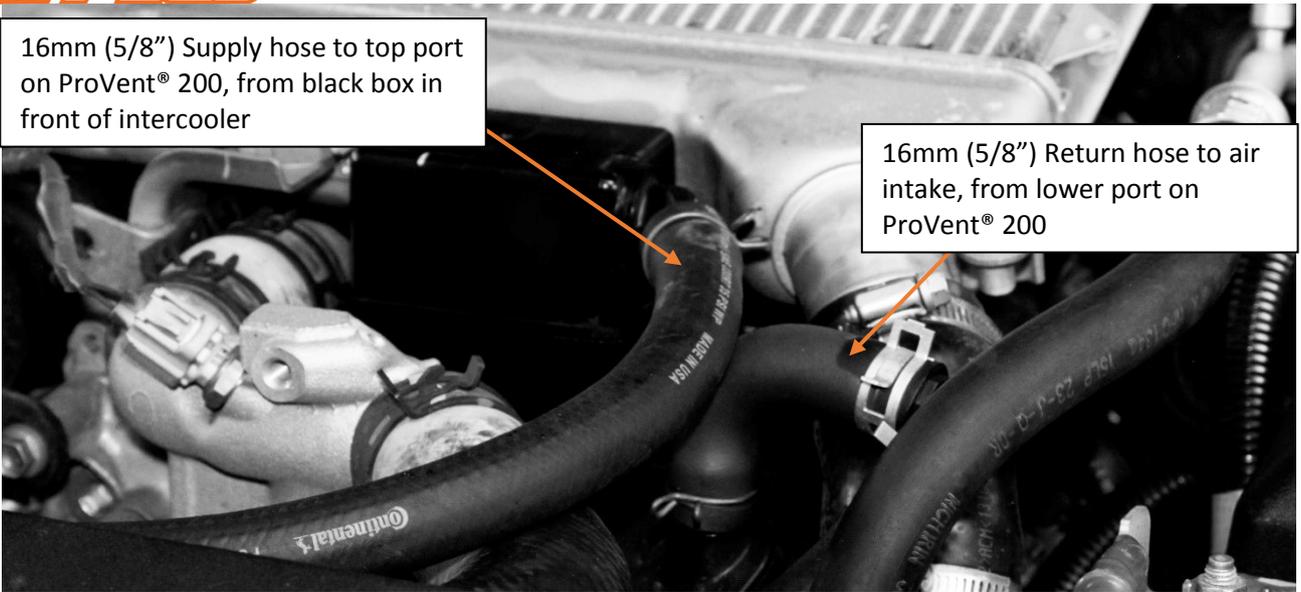

Hose configuration in Land Cruiser 200 Series with ProVent® 200 installed – Note, the hoses need to be run underneath the intake pipe in order to fit the engine cover back on, the hoses are long enough to allow for this, just make sure to keep clear of the radiator fan!!



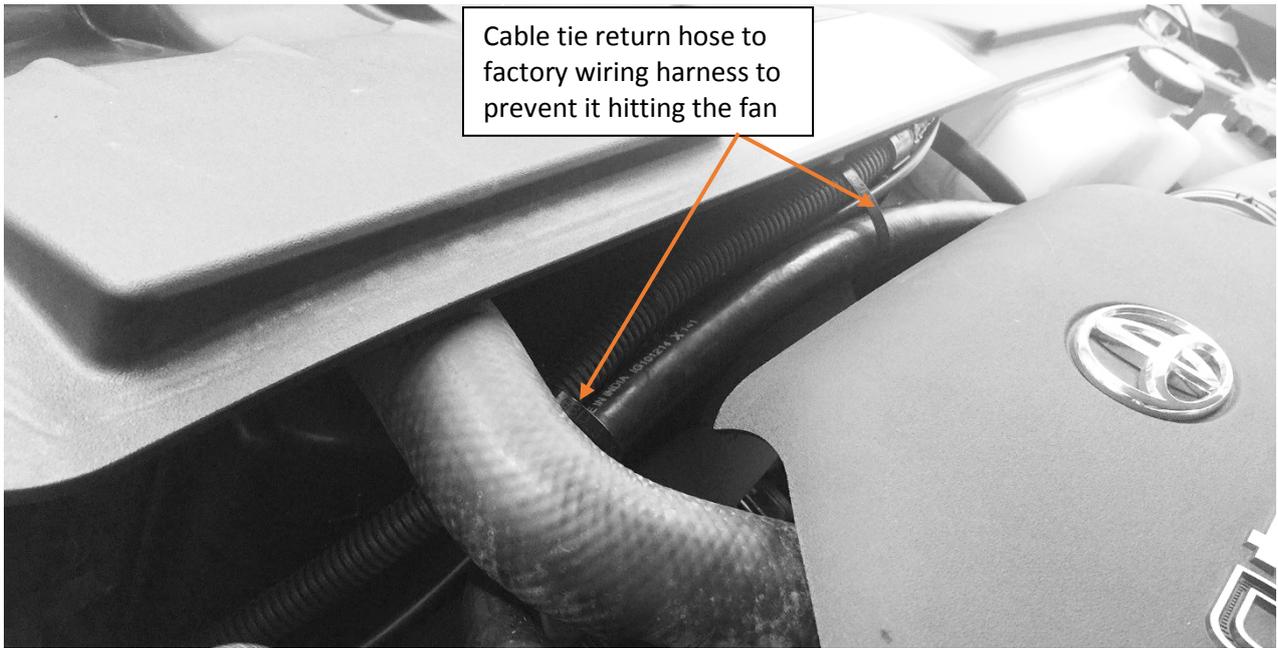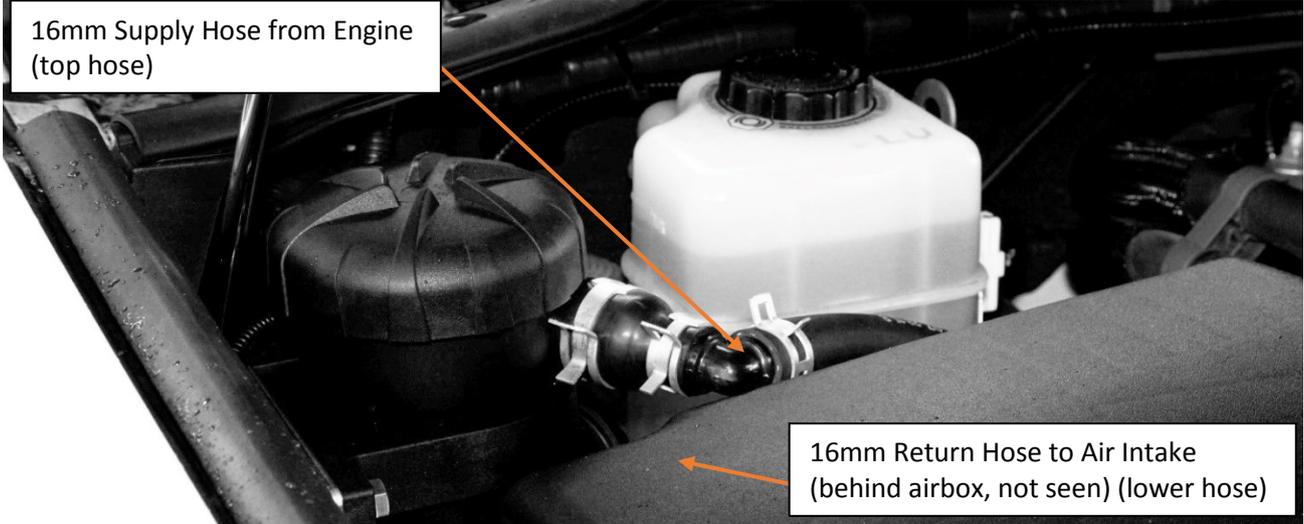



[End of Installation Guide](#)

ProVent 200

The housing can (prior to installation) be turned in the holder in 30° steps around the longitudinal axis.

This enables the position "Inlet and outlet fitting to flange" to be flexibly adjusted to the installation situation.

- Remove the retaining clip (1) upward from the groove and turn the holder into the desired position.
- Press the holder together somewhat in the desired position and engage the retaining clip in the groove again
- Mount the holder in the vertical position. Recommended tightening torque for M8 screws: 10 Nm.
- Ensure sufficient strength of the screw and nut material.
- Connect the hoses to the inlet, outlet and oil return fittings (make sure a sufficient length of hose is pushed on) and secure with hose clamps (see Chap.4.2 and 4.3).
- Connect the oil return hose (and non-return valve if necessary) to the oil sump.
- To ensure proper functioning, the ProVent should be protected against dirt (mount splash guards if necessary).

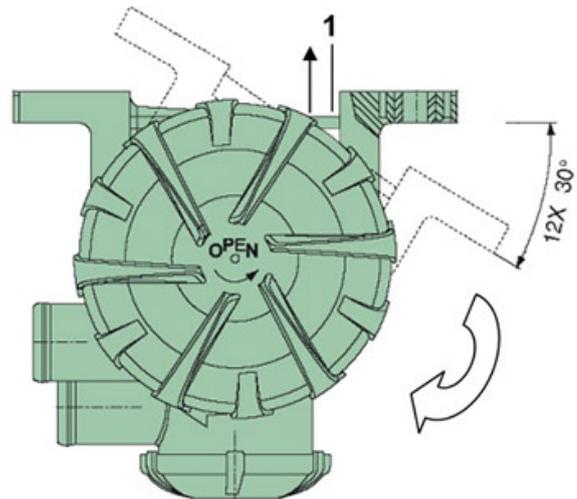


Fig. 5 Positions of outlet for ProVent 200

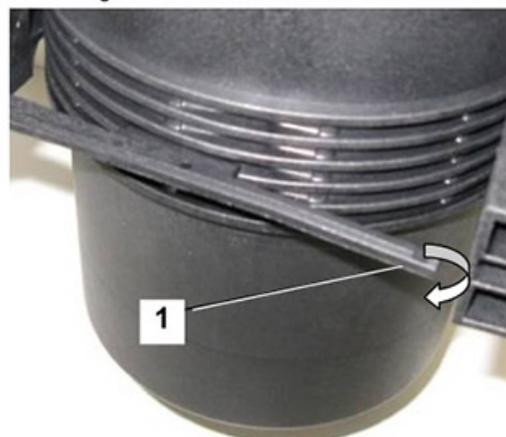


Fig. 6 Holder for ProVent 200