




MULTI-CORE MARINE TRAILER CABLE

ROLL

- Conductor: Tinned copper wire (TCW) to AS/NZS 1125
- Insulation: V90 PVC to AS/NZS3808
- Voltage: 50Vac or 120Vdc
- Applications: Caravan & trailer wiring
- Insulation thickness: 0.4mm
- Core colours: White, yellow, brown, red, green, black, blue
- Sheath colour: White
- Sheath thickness: 0.6mm

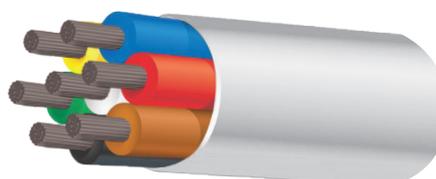

PRODUCT INFORMATION

Part No.	Size (mm)	Area (mm ²)	Amp@30°C	Cores	Length (m)	Strands/Dia.	Resistance (Ohm/km)	O.D (mm)	Mass (kg/100m)
CB005T5-030	2	0.5	6	5	30	16/0.2	40.1	5.4	4.9
CB005M7-050	2	0.5	5.5	7	50	16/0.2	40.1	5.4	4.9
CB005M7-100	2	0.5	5.5	7	100	16/0.2	40.1	5.4	4.9
CB025M5-050	3	1	8	5	50	32/0.2	20	7.2	8.2
CB025M7-050	3	1	7	7	50	32/0.2	20	7.2	8.2
CB025M7-100	3	1	7	7	100	32/0.2	20	7.2	8.2
CB004M3-030	4	1.84	14	3	30	23/0.32	10.3	9	17.7
CB004M3-050	4	1.84	14	3	50	23/0.32	10.3	9	17.7
CB004M7-050	4	1.84	14	7	50	23/0.32	10.3	9	17.7