

Front indicator

- Low profile design
- Shock, dust & water proof
- 5 Year warranty



Part Number

- 135CAT1** - 12 Volt, Blister single
- 135CAT124** - 24 Volt, Blister single
- 135CAT1B** - 12 Volt, Bulk poly bag
- 135CAT124B** - 24 Volt, Bulk poly bag

Function	Front Indicator Lamp
Size	135mm x 38mm x 24mm 145mm x 48mm x 10mm
Voltage	12 Volt or 24 Volt
LED Qty	18
Cable	40cm cable

Draw	
@13.8V	0.39A
@28V	0.17A

Approvals	Function	Category	CRN
ADR	12V Ind	6/00/1	39340
ADR	24V Ind	6/00/1	42131



Part Number

- 135CAT1G** - 12 Volt, Blister single



Part Number

- 235CAT1B** - 12 Volt, Bulk boxed
- 235CAT1-24B** - 24 Volt, Bulk boxed

Function	Front Indicator
Size	237mm x 25mm x 3mm
Voltage	12 Volt or 24 Volt
LED Qty	10
Cable	40cm cable

Draw	
@13.8V	0.19A
@28V	0.10A

Approvals	Function	Category	CRN
ADR	Indicator	6/00/1	44226



Available as surface mount with black, chrome or white brackets.


Fitting Instructions

135CAT1 - Horizontally mount onto flat surface & clip lens into place.

135CAT1G - Recess mount grommet (cut out for grommet 133mm x 36mm) horizontally to the ground & push lens into place.

235CAT1 - Recess mount grommet (cut out 203mm x 19mm) horizontally to the ground & push lens into place. Refer to ADR 13/00 for mounting instructions.

Technical Drawings

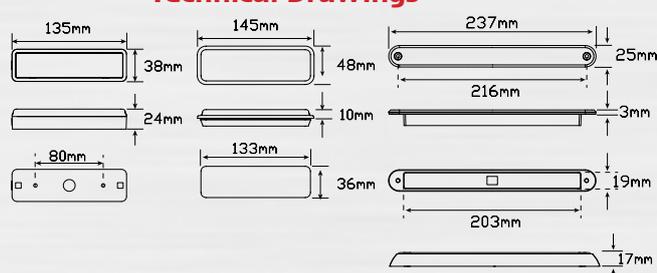

Blister Packaging

