




TWO CORE TWIN SHEATH CABLE

ROLL

- Conductor: Oxygen free plain copper wire to AS/NZS 1125
- Insulation: V90 PVC to AS/NZS3808
- Voltage: 50Vac or 120Vdc
- Applications: Trailer wiring/general purpose automotive wiring
- Insulation thickness: 0.4mm; 0.6mm for 6mm
- Sheath colour: Black
- Sheath thickness: 0.6; 0.7 for 5mm; 0.8 for 6mm

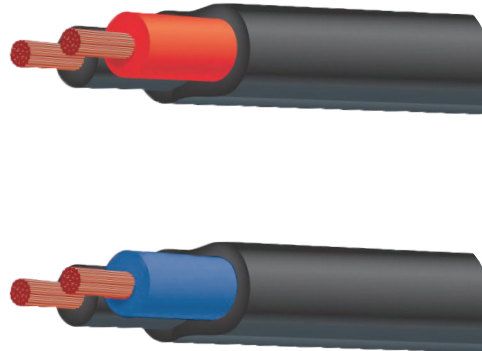

PRODUCT INFORMATION

Part No.	Size (mm)	Area (mm ²)	Amp@30°C	Length (m)	Core Colour	Strands/Dia.	Resistance (Ohm/km)	O.D (mm)	Mass (kg/100m)
CB002A2-030BKRD	2	0.56	10	30	Black & Red	7/0.32	33	3.1x4.9	2.7
CB002A2-100BKRD	2	0.56	10	100	Black & Red	7/0.32	33	3.1x4.9	2.7
CB025A2-100BKRD	2.5	0.64	13	100	Black & Red	8/0.32	29.9	3.2x5.2	3
CB003A2-030BKRD	3	1.13	16	30	Black & Red	14/0.32	16.5	3.3x5.5	4.1
CB003A2-100BKRD	3	1.13	16	100	Black & Red	14/0.32	16.5	3.3x5.5	4.1
CB003A2-500BKRD	3	1.13	16	500	Black & Red	14/0.32	16.5	3.3x5.5	4.1
CB003A2-030BNWE	3	1.13	16	30	Brown & White	14/0.32	16.5	3.3x5.5	4.1
CB003A2-100BNWE	3	1.13	16	100	Brown & White	14/0.32	16.5	3.3x5.5	4.1
CB004A2-030BKRD	4	1.84	22	30	Black & Red	23/0.32	10.1	3.8x6.3	6.1
CB004A2-100BKRD	4	1.84	22	100	Black & Red	23/0.32	10.1	3.8x6.3	6.1
CB004A2-500BKRD	4	1.84	22	500	Black & Red	23/0.32	10.1	3.8x6.3	6.1
CB004A2-030BNWE	4	1.84	22	30	Brown & White	23/0.32	10.1	3.8x6.3	6.1
CB004A2-100BNWE	4	1.84	22	100	Brown & White	23/0.32	10.1	3.8x6.3	6.1
CB005A2-030BKRD	5	2.9	29	30	Black & Red	36/0.32	6.4	4.5x7.4	8.8
CB005A2-100BKRD	5	2.9	29	100	Black & Red	36/0.32	6.4	4.5x7.4	8.8
CB005A2-100BEBK	5	2.9	29	100	Blue & Black	36/0.32	6.4	4.5x7.4	8.8
CB005A2-100BERD	5	2.9	29	100	Blue & Red	36/0.32	6.4	4.5x7.4	8.8
CB006A2-030BKRD	6	4.59	38	30	Black & Red	57/0.32	4.1	5.7x9.6	14
CB006A2-100BKRD	6	4.59	38	100	Black & Red	57/0.32	4.1	5.7x9.6	14