



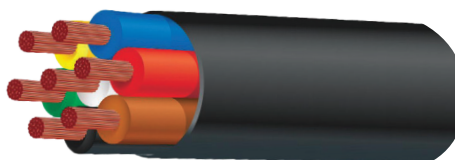

MULTI-CORE TRAILER CABLE

ROLL

- Conductor: Oxygen free plain copper wire to AS/NZS 1125
- Insulation: V90 PVC to AS/NZS3808
- Voltage: 50Vac or 120Vdc
- Applications: Caravan & trailer wiring
- Insulation thickness: 0.4mm
- Core colours: White, yellow, brown, red, green, black, blue
- Sheath colour: Black
- Sheath thickness: 0.6mm

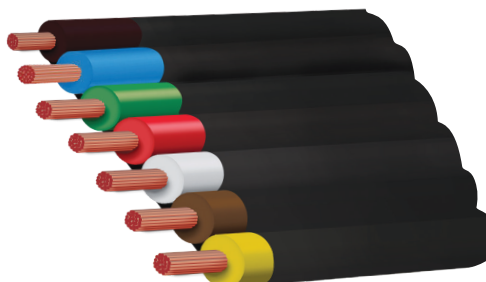

PRODUCT INFORMATION

Part No.	Size (mm)	Area (mm ²)	Amp@30°C	Cores	Length (m)	Strands/Dia.	Resistance (Ohm/km)	O.D (mm)	Mass (kg/100m)
CB005F7-030	2	0.56	7	7	30	7/0.32	33.1	Flat	5.5
CB002A5-100	2	0.56	7	5	100	7/0.32	33.1	6	5.5
CB025A5-030	2.5	0.64	8	5	30	8/0.32	29.9	6.7	6.4
CB025A5-100	2.5	0.64	8	5	100	8/0.32	29.9	6.7	6.4
CB025A7-030	2.5	0.64	8	7	30	8/0.32	29.9	7.3	8.3
CB025A7-100	2.5	0.64	8	7	100	8/0.32	29.9	7.3	8.3
CB003A3-030	3	1.13	14	3	30	14/0.32	16.8	5.7	5.9
CB003A3-100	3	1.13	14	3	100	14/0.32	16.8	5.7	5.9
CB003A5-030	3	1.13	11	5	30	14/0.32	16.8	7.1	9.1
CB003A5-100	3	1.13	11	5	100	14/0.32	16.8	7.1	9.1
CB003A7-030	3	1.13	10	7	30	14/0.32	16.8	7.7	12.1
CB003A7-100	3	1.13	10	7	100	14/0.32	16.8	7.7	12.1
CB004A5-030	4	1.84	15	5	30	23/0.32	10.3	8.2	13.1
CB004A5-100	4	1.84	15	5	100	23/0.32	10.3	8.2	13.1
CB004A7-030	4	1.84	14	7	30	23/0.32	10.3	8.9	17.7
CB004A7-100	4	1.84	14	7	100	23/0.32	10.3	8.9	17.7
CB004A12-100	4	1.84	14	12	100	23/0.32	10.3	12	30
CB006A5-030	6	5.22	30	5	30	57/0.32	4.1	12.5	28
CB006A7-030	6	5.22	30	7	30	57/0.32	4.1	16.5	40
CB006A7-100	6	5.22	30	7	100	57/0.32	4.1	16.5	40