


## FEATURES

- Multi-volt 10-30V DC input & low current draw
- Glow Tech tail light
- 100,000 hour LED life span with solid state technology
- Maintenance free
- High impact ABS housing and PMMA lens
- Water and dust proof
- Pre-wired with 300mm of sheathed tinned copper cable
- Sleek flush mount with chrome bezel
- ADR/ECE approved for all functions



LED COMBINATION LAMPS

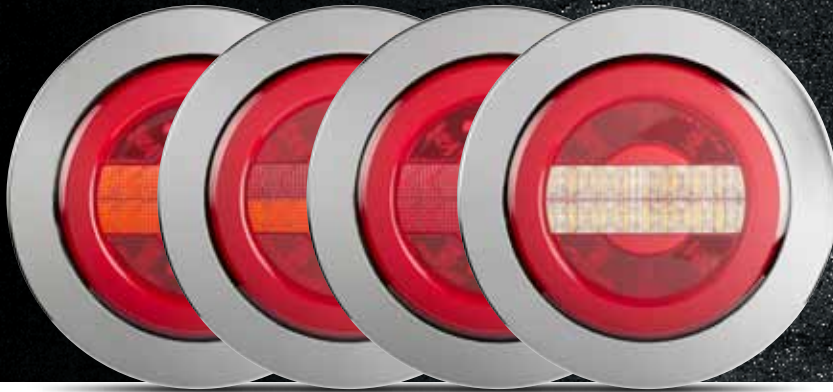

ROADVISION's BR152 Series round LED signal lamps are a versatile stand alone or combination lamp solution, featuring Glow Tech tail lights they have both a contemporary yet classic look! Roadvision's super bright LED signal lamps deliver the durability of maintenance free LED technology and greater visibility, providing increased safety with minimum current draw. Couple this with unbreakable PMMA lenses and an extremely tough housing manufactured from high impact ABS, the BR152 Series will survive the toughest environments. They are dust, water proof and totally maintenance free, with a life span rated at 100,000 hours. With the ROADVISION BR152 Series, it's FIT and FORGET.

### PART NUMBERS



**BR152ARRC**  
LED LED Indicator/Stop/Tail Lamp 10-30V Round



**BR152RRC**  
LED Stop/Tail Lamp 10-30V Round

### PART NUMBERS



**BR152RWC**  
LED Reverse/Tail Lamp 10-30V Round



**BR152ARC**  
LED Indicator/Tail Lamp 10-30V Round

SPECIFICATIONS	BR152ARRC	BR152RRC	BR152RWC	BR152ARC
<b>INPUT VOLTAGE</b>	10-30 VDC	10-30 VDC	10-30 VDC	10-30 VDC
<b>NUMBER OF LEDs</b>	Indicator - 8 LEDs, Stop - 8 LEDs, Tail - 20 LEDs	Stop - 16 LEDs, Tail - 20 LEDs	Reverse - 16 LEDs, Tail - 20 LEDs	Indicator - 16 LEDs, Tail - 20 LEDs
<b>CURRENT DRAW @ 13.8V</b>	Ind - 0.1A, S/T - 0.2/0.15A @ 13.8V	Stop/Tail - 0.2/0.15A @ 13.8V	Rev - 0.2A, Tail - 0.15A @ 13.8V	Ind - 0.08A, Tail - 0.15A @ 13.8V
<b>LENS CONSTRUCTION</b>	PMMA	PMMA	PMMA	PMMA
<b>HOUSING CONSTRUCTION</b>	High Impact ABS	High Impact ABS	High Impact ABS	High Impact ABS
<b>MOUNTING HOLE CENTRES</b>	45mm Stud Centres	45mm Stud Centres	45mm Stud Centres	45mm Stud Centres
<b>DIMENSIONS AXB</b>	150 x 38mm	150 x 38mm	150 x 38mm	150 x 38mm
<b>CABLE LENGTH</b>	250mm Sheathed	250mm Sheathed	250mm Sheathed	250mm Sheathed
<b>ADR APPROVAL</b>	S/T - E9*7R02/27*22475*00, Ind - E9*6R01/28*22475*00, E9*3R02/17*22475*00	S/T - E9*7R02/27*22476*00, Ref - E9*3R02/17*22476*00,	Tail - E9*7R02/27*22471*00, Rev - E9*23R00/22*22471*00, Ref - E9*3R02/17*22471*00	Tail - E9*7R02/27*22470*00, Ind - E9*6R01/28*22470*00, Ref - E9*3R02/17*22470*00
<b>WIRING</b>	Earth - White, Stop - Red, Tail - Brown, Indicator - Yellow	Earth - White, Stop - Red, Tail - Brown	Earth - White, Tail - Brown, Reverse - Yellow	Earth - White, Tail - Brown, Indicator - Yellow



BR152ARRC



BR152RRC



BR152ARC



BR152RWC

LINE DIAGRAM

