

LV9406C

50" 270W LED LIGHT BAR

- 27 x 10W LEDs
- Combination 40°+10°+40° beam pattern
- Stainless steel mounting brackets w/ bottom rail mount
- Die cast aluminium housing
- Black powder coated finish
- Polycarbonate lens
- 200mm cable w/ DT connector
- RFI/EMC protection
- Operating temperature: -40°C to +60°C
- Current draw: 16.6A @ 12V DC




Bottom Rail Mount




Side View



DIMENSIONS:

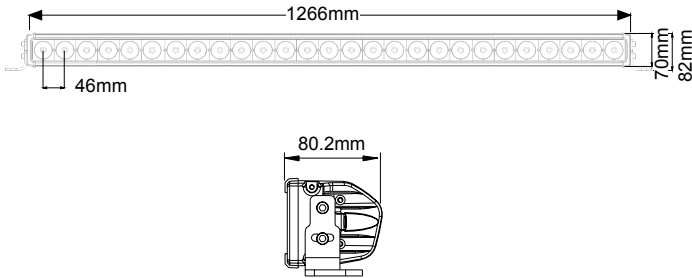

BEAM PATTERN:

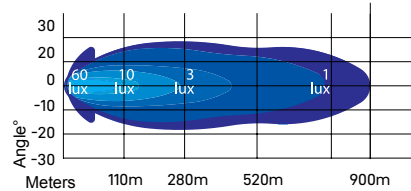

For your complete range of Accessories please refer to page 182-197

