


WDWL-8S80DT40-NPH

80W LED High Power Work Light

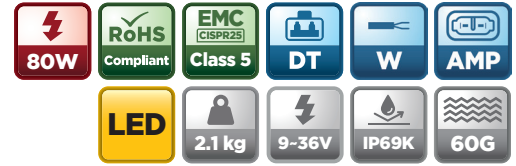

Features


- Off-road racing, ATV/UTV, truck, mining, agricultural, heavy-duty equipment, boat, construction, etc
- 200G shock resistance & 60G vibration rating
- Auto electronic thermal management system
- Die cast for superior heat dissipation
- Adjustable trunnion mounting bracket
- Vertical fins maximize heat dissipation
- Low power consumption
- TIR lens (Polycarbonate)
- ECE R10 certification
- CISPR25 class 5 rating

Specification

Wattage	Current draw(@12V)	Input voltage
80 W	6.7A	DC 9~36 V
Vibration rating	Operating temperature	IP rating
60 G	-40°C ~ +80°C	IP69K
LED lifespan	Housing color	Weight
30,000 hrs	Black	2.1kg
Luminous flux	Dimension	
6040lm	159mm(W) x 132.0(H) x 105(D)mm	

Dimensions

[Unit : mm]

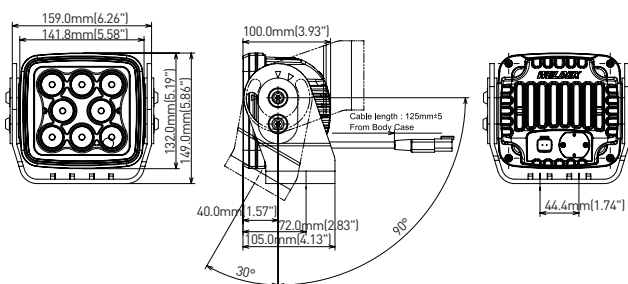

Cable Reference

DT: Deutsch connector / AM: AMP connector / W: Lead wire

- WDWL-8S80DT15 : 80-Watt 15° **narrow beam**
- WDWL-8S80DT40 : 80-Watt 40° **wide beam**
- WDWL-8S80DT75 : 80-Watt 75° **ultra wide beam**