


WDWL-5R60FSDT

60W Flood and Spot Work light

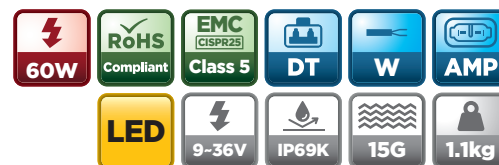

Features


- Die-cast for superior heat dissipation
- Adjustable trunnion mounting bracket
- Vertical fins maximize heat dissipation
- Low power consumption
- TIR lens (Polycarbonate)
- Off-road racing, ATV/UTV, truck, mining, agricultural, heavy-duty equipment, boat, construction, etc.
- ECE R10 certificated
- CISPR25 Class 5 rating

Specification


Wattage	Current draw(@12V)	Input voltage
60 W	5 A	DC 9~36 V
Luminous flux	Vibration rating	Operating temperature
5200 lm	15 G	-40°C ~ +80°C
IP rating	LED lifespan	Housing color
IP69K	50,000 hrs	Black
Weight	Dimension	
1.1 kg	160(W) x 100(H) x 118.9(D)mm	

Beam Pattern

Light Distribution Diagram

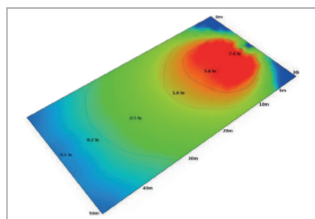

3D Mountain Plot



- Beam angle on field : 160 degree approximately

Cable Reference

DT: Deutsch connector / AM: AMP connector / W: Lead wire

- WDWL-5R60FSDT : 60-Watt **flood / spot beam combination**

Dimensions

[Unit : mm]

