

RWL34/36 SERIES

ROADVISION



FEATURES

- RWL34/36 Series LED work lamps produce up to 2400lm of instant light output
- Available in 4 or 6 LED flood or spot beams
- 3W Osram Hi-Lux spot or 5W Cree flood LED's
- Multi-volt, 10-30V DC input & super low current draw
- 50,000 hour LED lifespan with solid state technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- Water & dust proof IP67 rated
- Simple 2 wire installation
- Over/under voltage, reverse polarity protection & EMI/EMC radio interference approved



MULTI-VOLT
10-30 VDC



POLYCARB
LENS



ALUMINIUM
HOUSING



WATERPROOF



DEUTSCH
CONNECTOR



5 YEAR
WARRANTY

ROADVISION's RWL34/36 Series square work lamps offer uncompromised performance and energy efficiency in a compact, easy to install package. The RWL34/36 Series are designed to match the perfect LED and beam patterns, resulting in longer spot beam penetration utilizing 3W Hi-Lux Osram LED's and higher lux wider angle flood beams with 5W Cree LED's. Available in 4 or 6 LED configurations, they deliver the perfect light beam patterns for any application. Water and dust proof to IP67, the RWL34/36 Series feature a super durable light weight diecast housing and polycarbonate lens, allowing for worry free operation in even the toughest conditions.

PART NUMBERS




RWL3420F

Work Lamp LED 10-30V 20W Square Flood Beam




RWL3630F

Work Lamp LED 10-30V 30W Square Flood Beam

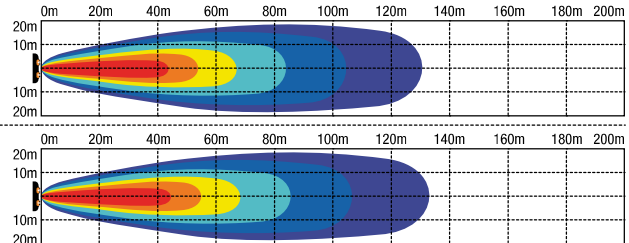

SPECIFICATIONS	RWL3420F	RWL3630F
LUMENS LIGHT OUTPUT (EFFECTIVE)	1600lm	2400lm
POWER WATTS	20W	30W
LUX @ 10M	42 Lux	44 Lux
INPUT VOLTAGE	10-30VDC	10-30VDC
CURRENT DRAW AMPS	1.5 Amps	2.2 Amps
DIMENSIONS AXBXC	81x76x85mm	81x76x85mm
WIRING	2 Pin Deutsch Plug	2 Pin Deutsch Plug

LINE DIAGRAM - 3400 SERIES



LINE DIAGRAM - 3600 SERIES

