


WDWL-5R33DT60

30W LED Work light

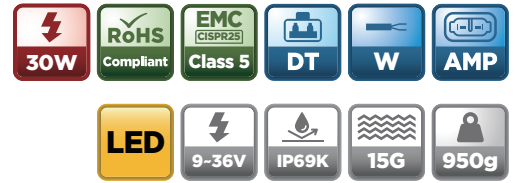

Features

- Die-cast for superior heat dissipation
- Adjustable trunion mounting bracket
- Horizontal fins maximize heat dissipation
- Low power consumption
- TIR lens (Polycarbonate)
- Off-road racing, ATV/UTV, truck, mining, agricultural, heavy-duty equipment, boat, construction, etc.
- ECE R10 certificated
- CISPR25 Class 5 rating

Specification

Wattage	Current draw(@12V)	Input voltage
32 W	2.6 A	DC 9~36 V
Luminous flux	Vibration rating	Operating temperature
3000 lm	15 G	-40°C ~ +80°C
IP rating	LED lifespan	Housing color
IP69K	50,000 hrs	Black
Weight	Dimension	
950 g	160(W) x 130(H) x 66(D)mm	

Cable Reference

DT: Deutsch connector / AM: AMP connector / W: Lead wire

- WDWL-5R33DT20 : 30-Watt 20° **narrow beam**
- WDWL-5R33DT40 : 30-Watt 40° **wide beam**
- WDWL-5R33DT60 : 30-Watt 60° **ultra wide beam**

Dimensions

[Unit: mm]

